
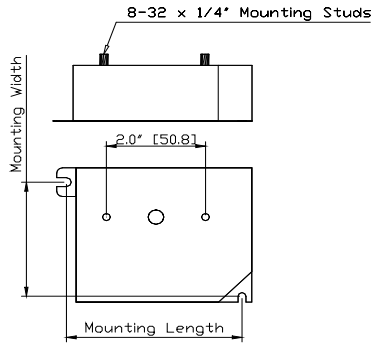
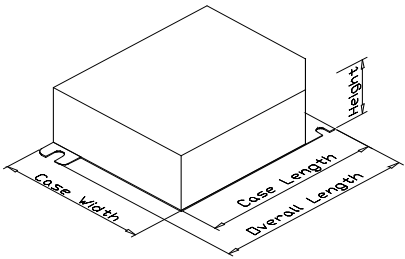
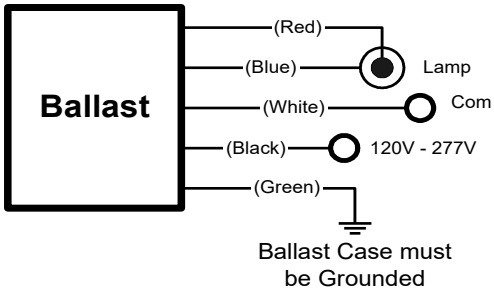



Electrical Specifications at 120-277V

DIMENSIONS AND DATA										
Lamp		Input Volts	Catalog Number*	Line Current (Amps)	Input Power (Watts)	Min Power Factor	Wiring Diag	Fig.	Weight (lb)	Max. Distance to Lamp (ft)
Number	Watts									
20W Watt Lamp, ANSI Code C156/M156 Minimum Starting Temp -20°C/-4°F										
1	20	120 277	IMH-G20-G-XXX	0.2 0.09	24 24	0.95	3	G	0.9	5
<div></div>							<div></div> <p>Wiring Diagram 3</p>			
Case Figure	Overall Length	Case Length	Case Width	Height	Mountin Length	Mounting Width				
G	97mm [3.8"]	90mm [3.5"]	77mm [3.0"]	30mm [1.2"]	87mm [3.4"]	67mm [2.6"]				
<div></div> <p>Case Temperature Measurement Location</p>							<div></div>			
INSTALLATION & APPLICATION NOTES:										
1. Maximum allowable case temperature is 90°C. See figure above for measurement location										
2. Ignition pulse is 4 kV max										
3. All leads are 9 inches long										
4. Ballast output will shutdown after 20 minutes if lamp fails to ignite										
5. Power must be cycled off – then on, after replacing lamp										
6. Connect the red lead to the center terminals of the lamp when using screw base lamps										
Data is based on tests performed by Philips Advance in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.										

The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.

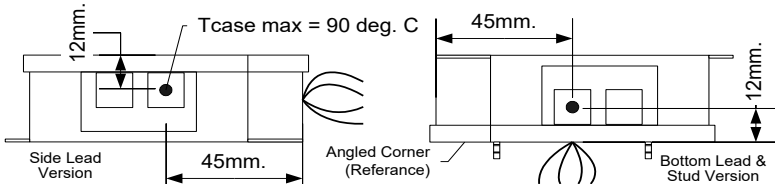