



BASELITE – HALF DOME – INC – SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	/	/
	A	B	C	D	E	F	G	H	I	J	K
EXAMPLE:	HD16	41	B15	CB ½"	43	45W	3K	LDM120	PR3	GR16	44

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES:

BASHD12INCBLC62



HD20/58/BHC/100INC

A - SHADES

HALF DOME

HD10 - 150W INC (MAX)

HD12 - 150W INC (MAX)

HD14 - 150W INC (MAX)

HD16 - 150W INC (MAX)

HD18 - 150W INC (MAX)

HD20 - 150W INC (MAX)

HD24 - 150W INC (MAX)

HD30 - 150W INC (MAX)

HD36 - 150W INC (MAX)

HD42 - 150W INC (MAX)

HD48 - 150W INC (MAX)

HDG12 - 150W INC (MAX)

QD16 - 150W INC (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)
(SEE NOTES FOR LIMITATIONS)

14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB, 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C – MOUNTING OPTIONS

½" ARM EXTENSIONS

E1, E2, E3, E4, B1, E16, E17, E18

¾" ARM EXTENSIONS

E3A, E4A, E5, E6, E7, E8, E9, E10, E11, E12, E13, B15, B15S, E19, E20, E21, E25

E14 - CREATE YOUR OWN

(BASELITE WILL TAKE YOUR SKETCH AND FABRICATE A CUSTOM ARM EXTENSION TO MEET YOUR NEEDS).

¼" WALL MOUNT

WM20, WM21, WM23, WM26, WM29, WM29V

½" WALL MOUNT

B13, WM13, WM13R, WM13X, B10, B11, B101

¾" WALL MOUNT

B9, B9C, B12, WM10, WM11, WM14, WM15, WM35, WM55, WM60, WM61, WM70, WM71

CORD MOUNT

BLC, WHC, TCB, TCW, TCHB, TCHW, TLB, TLW, TLB, TLW, RCB, RCW, RCHB, RCHW, FHB, FHW, HBLC, HWHC, CBLC, CWHC

STEM MOUNT

ST6, ST12, ST18, ST24, ST36, ST48, STXX

D – MOUNTING ADD-ONS

INC ADD-ONS

CB1/2", CB3/4", CBC1/2", CBC3/4", SLC1/2", SLC3/4" STC1/2"

UNIVERSAL ADD-ONS

SQ ½", SQ ¾", FH ½", FH ¾", TRB ½", TRB ¾",

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)

INCANDESCENT (INC)

100W, 150W

G – LED COLOR TEMP

NOT AVAILABLE

H – ELECTRICAL OPTION

NOT AVAILABLE

I – GLASS OPTIONS

CL3, CL4, CLT3, CLT4, BL3, BL4, RE3, RE4, GR3, GR4, AH3, AH4, FR3, FR4, FRT3, FRT4, PR3, PR4, BA, BAX, BAF, PR8, PR8F, FN, OC

J – ACCESSORIES

GR10, GR12, GR14, GR16, GR18, GR27, REF, UGR, LGR10, LGR12, LGR14, LGR16, LGR18, LGR27, CRL10, CRL12, CRL14, CRL16, CRL18, CRL27, FLE10, FLE12, FLE14, FLE16, FLE18, FLE27, FGR10, FGR12, FGR14, FGR16, FGR18, FGR27, GU-1, GU-2, WG-1, WG-2

K – ACCESSORY COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

NOTES

- (1). FINISH OPTIONS 20, 21, 22, 23 ARE FOR SOLID BRASS FIXTURES ONLY.
- (2). FINISH OPTIONS 19, 21, 22, 23, 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
- (3). FINISH OPTIONS 19, 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- (4). FINISH OPTIONS FOR SHADES ≤ 10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES > 10" IN DIAMETER ARE WHITE ON THE INSIDE.
- (5). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
- (6). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.

- *ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).
- *ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).
- *ALL FIXTURES MOUNT TO A 4-0 JUNCTION BOX.
- *FIXTURE DIMENSIONS MAY VARY ± 0.25.



HD10 H-5" W-10"

HD12 H-6" W-12"

HD14 H-7" W-14"

HD16 H-8" W-16"

HD18 H-9" W-18"

HD20 H-10" W-20"


HD24 H-12" W-24"

HD30 H-15" W-30"

HD36 H-18" W-36"


HD42 H-21" W-42"

HD48 H-24" W-48"



HDG12 H-9" W-13.5"

*EFGR COMES STANDARD WITH SHADE. ALL OTHER ACCESSORIES DO NOT APPLY

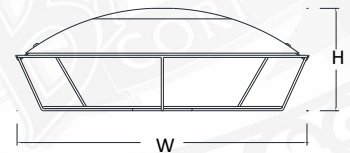

QD16 H-6" W-17"

*EFGR COMES STANDARD WITH SHADE. ALL OTHER ACCESSORIES DO NOT APPLY



C - MOUNTING OPTIONS

1/2" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED




E1 8.5"(H) 18.5"(W)



E2 18.5"(H) 35"(W)



E3 16"(H) 24.75"(W)



E4 14.5"(H) 22.25"(W)



E16 4.75"(H) 8.5"(W)



E17 4.75"(H) 9.5"(W)




E18 4.75"(H) 12"(W)



B1 6"(H) 12"(W)

3/4" ARM EXTENSIONS


*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

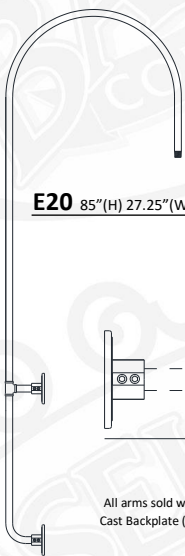


E20 85"(H) 27.25"(W)




E3A 16.375"(H) 26.25"(W)




E4A 14.5"(H) 23.75"(W)



E5 15"(H) 38.5"(W)




E6 9"(H) 23.75"(W)




E9 41.75"(H) 28.125"(W)




E12 6(H) 39"(W)




E7 9"(H) 49.75"(W)




E8 12"(H) 31.25"(W)



Baselite will take your sketch and fabricate a custom arm extension to meet your




B15 7.5"(H) 24.5"(W)



E10 18"(H) 55.75"(W)




E11 19"(H) 36.5"(W)



E25 32.625"(H) 28.5"(W)


All arms sold with Cast Backplate (CB)



B15S 7.5"(H) 19.5"(W)



E21 12.5"(H) 28.5"(W)

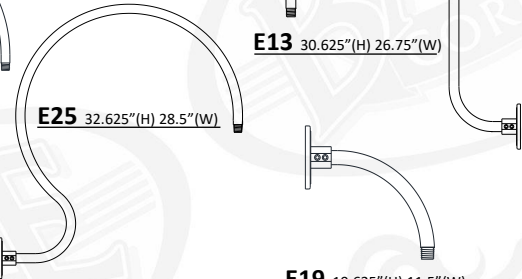


E13 30.625"(H) 26.75"(W)

E19 10.625"(H) 11.5"(W)

1/4" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION *FOR SHADES 10" OR SMALLER IN DIAMETER * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED



WM20 6"(H) 8.25"(W)




WM21 4.75"(H) 8"(W)




WM23 12.5"(H) 8"(W)



WM26 12"(H) 9"(W)



WM29 9.5"(H) 14"(W)



WM29V 21.75"(H) 15.25"(W)

1/2" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED



B10 6"(H) 12.5"(W)



B101 6"(H) 13.5"(W)



B11 6"(H) 14.5"(W)




B13 6"(H) 16.5"(W)



WM13 12"(H) 9.5"(W)



WM13R 12"(H) 9.5"(W)



WM13X 12"(H) 10.5"(W)



C - MOUNTING OPTIONS (CONTINUED)

3/4" WALL MOUNTS


*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED



B12 6"(H) 15.5"(W)




B9 5"(H) 18"(W)



B9C 5"(H) 18"(W)


*CHAIN HEIGHT TBD BY CUSTOMER



WM14 18"(H) 12"(W)




WM15 23"(H) 19.5"(W)




WM18 30"(H) 20"(W)



WM35 26"(H) 18.25"(W)




WM55 19"(H) 25.5"(W)




WM60 18"(H) 20"(W)



WM61 18"(H) 20"(W)




WM70 18"(H) 20"(W)



WM71 18"(H) 20"(W)

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

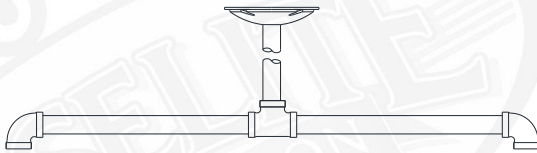

DP24 DOUBLE PENDANT 20"(H) 24"(W)

*DP24 COMES STANDARD WITH STC AND ST18



ST(XX) STEM- 1/2" NPT

XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D
* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST



SC24 SCROLL STEM 33"(H) 26"(W)

*SC24 COMES STANDARD WITH STC

INCANDESCENT CORD MOUNTS

*INCANDESCENT MAX WATTAGE 150 WATT. CALL FACTORY FOR HIGHER WATTAGES. LOOPS, CABLES, AND CHAINS AVAILABLE ONLY FOR INCANDESCENT
*CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: .625" (H) 5.25" (W)



BLC 8' BLACK CORD
WHC 8' WHITE CORD



TCB 8' BLACK CORD, CABLE, and LOOP
TCW 8' WHITE CORD, CABLE, and LOOP



TCHB 8' BLACK CORD, 3" CHAIN, and LOOP
TCHW 8' WHITE CORD, 3" CHAIN, and LOOP



TLB 8' BLACK TELEPHONE CORD AND CABLE
TLW 8' WHITE TELEPHONE CORD AND CABLE


* Not available H.I.D.



RCB 8' BLACK CORD, CABLE, and LOOP
RCW 8' WHITE CORD, CABLE, and LOOP



RCHB 8' BLACK CORD, 3" CHAIN, and LOOP
RCHW 8' WHITE CORD, 3" CHAIN, and LOOP



FHB 8' BLACK CORD WITH FLAT HUB
FHW 8' WHITE CORD WITH FLAT HUB



HBLC 8' BLACK CORD (H.I.D.)
HWHC 8' WHITE CORD (H.I.D.)

*(Remote ballast shades only)




CBLC 8' BLACK CORD and CABLE
CWLC 8' WHITE CORD and CABLE




D - MOUNTING ADD-ONS


INCANDESCENT STEM AND ARM ADD-ONS




CB 1/2" CAST ALUMINUM BACKPLATE 1/2 NPT
CB 3/4" CAST ALUMINUM BACKPLATE 3/4 NPT



CBC 1/2" 1/2" BACKPLATE COVER
CBC 3/4" 3/4" BACKPLATE COVER
* Includes slip ring to hold 1/2" or 3/4" arm extension

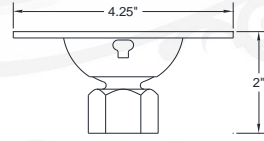

SLC 1/2" SLOPE CEILING CANOPY 1/2"
SLC 3/4" SLOPE CEILING CANOPY 3/4"
*(Slopes To 20 Degrees)



STC 1/2" 1/2" STEM MOUNT CANOPY

UNIVERSAL STEM AND ARM ADD-ONS


* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:

MODEL #: -/-/-(L)WTM, TRB 1/2", (L)GSWL-/-/-(L)I
 A B C D E F G H I J



CNK CANOPY For MULTIPLE FIXTURES

*CNK dimensions vary on number of fixtures applied



LGSWL 1/2" NPT SWIVEL
For all shades greater than 7" wide in diameter



FH 1/2" FLAT HUB 1/2"
FH 3/4" FLAT HUB 3/4"



TRB 1/2"-4' Cable SUPPORT
TRB 3/4"-4' Cable SUPPORT

F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

INCANDESCENT (INC) MED E26					
INC 150W- HD10, HD12, HDG12, HD14, HD16, HD18, HD20, HD24, QD16			*IMPORTANT – FOR INCANDESCENT (INC) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT.		
EXAMPLE: / INC150W /					
OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
100WINC	100W	PER BULB SPECS	>90	120-277 VAC	N/A
150WINC	150W	PER BULB SPECS	>90	120-277 VAC	N/A



I – GLASS OPTIONS

*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION.



CL3 3" CLEAR GLASS



PR3 3" PRISMATIC GLASS



RE3 3" RED GLASS



BL3 3" BLUE GLASS

CL4 4" CLEAR GLASS

PR4 4" PRISMATIC GLASS

RE4 4" RED GLASS

BL4 4" BLUE GLASS

CLT3 3" CLEAR TEMPERED

CLT4 4" CLEAR TEMPERED



FR3 3" FROSTED GLASS



AH3 3" AMBER HYDE GLASS



GR3 3" GREEN GLASS

FR4 4" FROSTED GLASS


AH4 4" AMBER HYDE GLASS

GR4 4" GREEN GLASS

FRT3 3" FROSTED TEMPERED

FRT4 4" FROSTED TEMPERED

GLASS – DIMENSIONS	
3" GLASS	
Diameter	3.34"
Height	6.93"
Fitter	3.29"
4" GLASS	
Diameter	4.34"
Height	8.37"
Fitter	4.29"



GLASS – MAX WATTAGE	
3" GLASS – 100W INC / LED12W	
4" GLASS – 200W INC / LED25W	



BA 6" OPAL BALL
(100W INC MAX/LED12W)



BAX 9" CLEAR GLOBE
BAF 9" FROSTED GLOBE
(200W INC MAX/LED25W)



FN 8" CLEAR TEXTURED GLOBE
(150W INC MAX/LED25W)



BA7 7" CLEAR GLOBE



PR8 8" PRISMATIC




OC 8" OPAL TAPERED GLOBE
(60W INC MAX/LED25W)


BA7F 7" FROSTED GLOBE
(100W INC MAX/LED25W)

PR8F 8" PRISMATIC FROSTED
(200W INC MAX/LED45W)


J – ACCESSORIES




- GR10** 10" WIRE GRILL
- GR12** 12" WIRE GRILL
- GR14** 14" WIRE GRILL
- GR16** 16" WIRE GRILL
- GR18** 18" WIRE GRILL
- GR20** 20" WIRE GRILL
- GR24** 24" WIRE GRILL




- LGR10** 10" LOUVERED GRILL
- LGR12** 12" LOUVERED GRILL
- LGR14** 14" LOUVERED GRILL
- LGR16** 16" LOUVERED GRILL
- LGR18** 18" LOUVERED GRILL
- LGR20** 20" LOUVERED GRILL
- LGR24** 24" LOUVERED GRILL




- FGR10** 10" FLAT GRILL
- FGR12** 12" FLAT GRILL
- FGR14** 14" FLAT GRILL
- FGR16** 16" FLAT GRILL
- FGR18** 18" FLAT GRILL
- FGR20** 20" FLAT GRILL
- FGR24** 24" FLAT GRILL



- CRL10** 10" CURVED POLYCARB LENSE
- CRL12** 12" CURVED POLYCARB LENSE
- CRL14** 14" CURVED POLYCARB LENSE
- CRL16** 16" CURVED POLYCARB LENSE
- CRL18** 18" CURVED POLYCARB LENSE
- CRL20** 20" CURVED POLYCARB LENSE
- CRL24** 24" CURVED POLYCARB LENSE




- FLE10** 10" FLAT CLEAR LENSE
- FLE12** 12" FLAT CLEAR LENSE
- FLE14** 14" FLAT CLEAR LENSE
- FLE16** 16" FLAT CLEAR LENSE
- FLE18** 18" FLAT CLEAR LENSE
- FLE20** 20" FLAT CLEAR LENSE
- FLE24** 24" FLAT CLEAR LENSE




REF 9.5" DIAMETER REFRACTOR
(AVAILABLE FOR DC SERIES ONLY)




UGR U- WIRE GUARD




WG-1 WIRE GUARD



WG-2 WIRE GUARD
Available for shades
12" or higher



GU-1 CAST ALUMINUM GUARD



GU-2 CAST GUARD
Available for shades
12" or higher