

TR SERIES

PREPARED BY: _____



TYPE: _____

JOB NAME: _____

DATE: _____

CERTIFICATION: UL LISTED

MODEL#	D	H
TR-FRFC	8 1/2"	15"
TR-D	12"	13 3/4"
TR1-PR	12"	15"
TR-FRFC ARFL ARFR	12"	16 1/2"
TR-D FRFC ARFL ARFR	14 1/4"	13"
TR1-PR ARFR ARFL	15"	16"

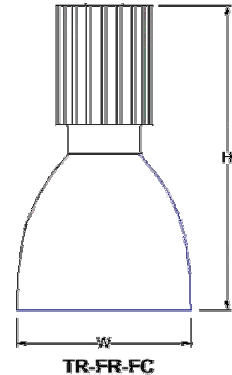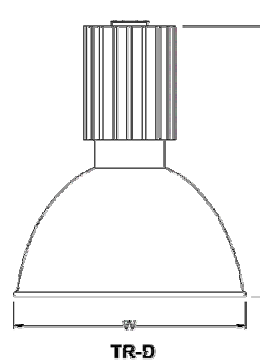

FINISH-Five stage pretreatment process, coated with a lead free TGI C polyester powder coat finish. White is standard inside reflectors, Except #49-Galvanized, #62-Anodized Bronze and #63-Iron Rust, Unless specified. Custom colors and Marine are available upon request.

MOUNTING- 1/2" or 3/4" tapped hub is supplied. Top or side mount available. Fixtures are pre-wired with 48" or 96" leads. Available with cord or stem sets.

REFLECTOR- Spun from heavy gauge 1100-0 aluminum, ranging in thickness from .050 to .125. Galvanized is from 20 gauge sheets. Copper is spun from .040 gauge and 110 soft alloy.

LAMP HOLDERS- Accommodates **Compact Fluorescent** 4 pin heat resistant thermoplastic socket accommodates 26/32W (Gx24q-3 base) and 42W (Gx24q-4 base). Twist lock design provides for vibration and earthquake resistance, rated 75W, 600V.

High Intensity Discharge (H.I.D.) medium base, 4KV pulse start socket, rated 660W/600V.

LED. A minimum of 60,000 hours to 100,000 expected life depending on installation location and ambient temperature.

MODEL#	FINISH	SHADE	LIGHT SOURCE			MOUNTING	OPTIONS	ACCESSORIES
			CF	INC	LED			
TR	41-black 44-white 48-polish alum. 51-arch. Brz. 53-rust 58-satin alum. clear coat	FR-frosted FC-frosted CHARCOAL L D-metal dome PR-prismatic	1X26, 32, 42WCF 4X26, 32, 42WCF	150W INC	25W 50, 80, 100W	TLB-8' tele blk cord/cable TLW-8' tele wht cord/cable TCB-8' blk cord/cable TCW-8' wht cord/cable	DM ¹ -dimming ballast EM ² -emergency ballast-	ARFL-arms w/ flat lense ARFR-arms w/ flat ring
	59-coppertone 61-anod. Charcoal 62-anod. bronze	FPR-frosted PRISMATIC IC	1X26, 32, 42WCF 2X26, 32, 42WCF	150W INC		3CBLC-3 blk cable & cord 3CWHC-3 wht cable & cord BLC-8' blk cord and canopy	DM-0-10V	

¹ Mark 7 or Mark 10/120V or 277V

² 750Lumen/120v or 277V

PHONE: 877-999-1990
FAX: 877-999-1955

12260 EAST END AVE. CHINO, CA 91710

MADE IN

U. S. A.

