



A - MOUNTING STYLE

C	Cord Hung
CN	Chain Hung
F	Flush Mount ²
G	Gooseneck
S	Stem Mount

B - SHADE SIZE

STERLING:

DCS12² DCS14

DCS16

C - SHADE FINISH

PORCELAIN FINISHES3:

UNCLLA	III I IIVISIILS .
150	Black
250	White
350	Vintage Green
355	Jadite
455	Cherry Red
550	Yellow
650	Bronze
750	Cobalt Blue
765	Delphite Blue
850	Graphite
950	Metallic Chrome

54:

100 E 105 T 200 N 300 E 307 E 311 J 370 N 380 G 390 T 400 E 420 M 495 E 500 E 570 E	COAT FINISHES Black Fextured Black White Dark Green Emerald Green adite Mint Chartreuse Feal Barn Red Drange Watermelon Blush Pink Magenta Cherbet Orange Buttery Yellow Founflower Bronze Chocolate Rust Dil-Rubbed Bronze Royal Blue
---	--

C - SHADE FINISH (CONTINUED)

POWDER	COAT FINISHES⁴.
705	Navy
710	Cobalt Blue
715	Delphite Blue
790	Lavender
800	Industrial Grey
805	Charcoal Granite
810	Graphite
975	Galvanized

D - MOUNTING

CSA LISTED CORD OPTIONS:

SBK	Standard Black
SWH	Standard White
CMG	Grey Cotton
CRZ	Red Chevron
CSB	Black Cloth
CSW	White Cloth
CSR	Red Cloth
CSBB	Black & Brown Cloth
CSRW	Red & White Cloth
CSGW	Gold & White Cloth
CSBG	Black & Gold Cloth
CSBW	Black & White Cloth
CSBP	Black & Pink Cloth
CSUW	Blue & White Cloth

NON-CSA LISTED CORD OPTIONS:

CBK	Black Cotton
TBK	Black Cotton Twist
TWH	White Cotton Twist
TBR	Brown Cotton Twist
TRD	Red Cotton Twist
TPT	Putty Cotton Twist
TBW	Black & White Twist
TRW	Red & White Twist
TBB	Brown & Beige Twist

CHAIN MOUNT OPTIONS:

CN36 3' of Chain **CN48** 4' of Chain CN60 5' of Chain CN72 6' of Chain

FLUSH MOUNT OPTIONS:

FM

D - MOUNTING (CONTINUED)

GOOSENE	CK OPTIONS:
G1	G16
G2	G17
G3	G19
G4	G22
G5	G24
G6	G25
G7	G26
G8	G32
G9	G34
G10	G35
G11	G36
G12	G40
G13	G64
G14	G65
G15	

STEM MOUNT OPTIONS:

ST506	.5" Stem Mount, 6"
ST512	.5" Stem Mount, 12"
ST518	.5" Stem Mount, 18"
ST524	.5" Stem Mount, 24"
ST536	.5" Stem Mount, 36"
ST548	.5" Stem Mount, 48"
ST706	.75" Stem Mount, 6"
ST712	.75" Stem Mount, 12"
ST718	.75" Stem Mount, 18"
ST724	.75" Stem Mount, 24"
ST736	.75" Stem Mount, 36"
ST748	.75" Stem Mount, 48"

E - MOUNTING FINISH

Please Note: See Section C for Finish Options. 980-Brushed Aluminum is also available for Gooseneck and Stem mounting styles. If Porcelain Finish is selected, mounting will be powder coat painted-to-match. . (I) If Cord Hung [C] or Flush Mount [F] Mounting Style, selection identifies canopy finish (II) If Chain Hung [CN] Mounting Style, selection identifies chain and canopy finish (III) If Stem Mount [S] Mounting Style, selection identifies stem and canopy finish

980 **Brushed Aluminum**

F - CORDS1

NA Not Applicable

Please Note: See **Section D** for all applicable CSA and Non-CSA Listed Cord Options for Chain Hung Mounting Style

G - SHADE ACCESSORIES

NA	None
WC	Wire Cage
ACR	Acrylic Diffuser5,7,9
TGG	Heavy Duty Guard
CGG	Cast Guard
WGG	Wire Guard

H - SHADE ACCESSORY FINISH

Please Note: See Section C for Finish Options. Natural Finishes not applicable with Acrylic Diffuser Guard, Wire Cage or Guard. If Porcelain Finish is selected, accessory will be powder coat painted-to-match

NΑ Not Applicable

I - GLASS OPTION

NA	Not Applicable
CLR	Clear Glass ⁶
FST	Frosted Glass ⁶
RIB	Ribbed Glass ⁶
BLU	Blue Glass ⁶
RED	Red Glass ⁶
AMB	Amber Glass ⁶
GRN	Green Glass ⁶
CCR	Clear Crackle Glass ⁶
SMK	Smoke Crackle Glass ⁶
HCR	Honey Crackle Glass ⁶

J - MOUNTING ACCESSORY

NA	None/Not Applicable
HSC	Hang Straight Canopy ⁸
HDSMC	Heavy Duty Stem Mount
	Canopy ⁸
HDBP	Heavy Duty Backing Plate
DD	Dusk-to-Dawn Photocell
DBPC	Decorative Backing Plate
	Cover
DCHX	Decorative Backing Plate
	Cover & Hex Cover


K - LIGHT SOURCE

E26	200 Watt Max
GU24	23 Watt Max ²


IMPORTANT: (1) Only applicable if Chain Hung Mounting Style selected in Section A, select NA if another Mounting Style is selected (2) Not available with Acrylic Diffuser accessory (3) All Porcelain Enamel finished shades feature a white interior and a black outer rim (4) All Powder Coat finished shades, Galvanized excluded, feature a white interior (5) Acrylic Diffuser accessory reduces incandescent wattage to 40W (6) Guard and Glass accessory reduces incandescent wattage to 100W Max and GU24 Bi-Pin to 18W Max (7) Not available with the Guard & Glass Accessory (8) Only applicable if Stem Mounting Style is selected in Section A (9) Fixture is UL Listed for Damp Locations with Acrylic Diffuser

MOUNTING STYLE


CHAIN HUNG PENDANT (CN)




CORD HUNG PENDANT (C)

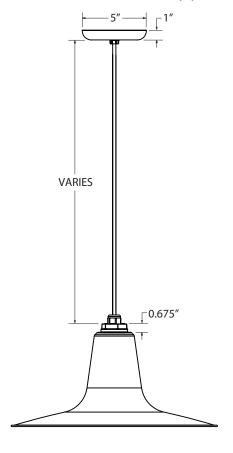

FLUSH MOUNT (F)

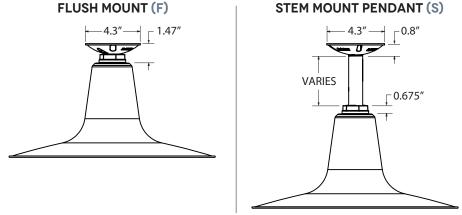


GOOSENECK (G)

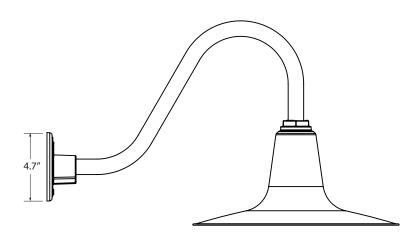

SHOWN WITH: G15 GOOSENECK ARM

LUMINAIRE DIMENSIONS



SHOWN WITH: OPTIONAL GUARD & GLASS ACCESSORY

SHADE CODE	HEIGHT (A)	DIAMETER (B)	EXTENSION (C)
DCS12	5.75"	12"	6.7"
DCS14	6.50"	14"	6.2"
DCS16	7"	16"	5.6"

BARN LIGHT ELECTRIC CO. STERLING SERIES SPS-0157 REV A

SPECIFICATIONS

MOUNTING

STEM

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Mounting Stem. Custom Lengths Available upon Request.

GOOSENECK

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Gooseneck

CORD

Cord-Hung Pendants Include 7' of Standard Cord or 5' of Cotton or Cloth Cord, +/- For Socket Orientation

CHAIN

4-Guage Chain Complete with Quick Link for On-Site Adjustments to Chain's Length

MAX FIXTURE WEIGHT

10 lbs

LIGHT SOURCE

INCANDESCENT

Medium Base E26 Socket, 120 VAC

COMPACT FLOURESCENT

Bi-Pin Base GU24 Socket, 120 VAC

LED

Sterling Series Also Available in LED. Please Visit Website for LED Specifications.

MATERIAL & FINISHES

POWDER COAT SHADE

Hand-Spun from High Purity 0.050" Thick 3003-O Temper Aluminum

PORCELAIN SHADE

Hand-Spun from 20 Gauge Sheet Metal

POWDER COAT FINISHES

Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured

PORCELAIN FINISHES

Applied by Hand and Fired in a High Temperature Oven

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA

Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS

Includes All Gooseneck, Stem and Flush Mounting Styles

CSA LISTED FOR DAMP LOCATIONS

Includes All Chain and Select Cord Hung Mounting Styles

LIMITED WARRANTY

For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions

UL CERTIFICATION

UL Listed Fixtures Available upon Request. Please Consult Factory for Additional Information.