

**Specifications/Features**

**Housing/Mounting**

Specification grade 4" remodel housing, 5-1/4" O.D. plaster ring flange. 4-7/8" Ceiling opening.

16 Gauge galvanized steel housing with die-cast aluminum heat sink. Requires minimum 3" clearance around fixture from insulation material. Thermal protection provided in case of improper insulation use. Heavy duty steel plaster ring is secured to ceiling by three (3) spring clamps.

LED drivers are fully accessible from below the ceiling, and can be easily removed.

Quick-connect LED light engine enables easy installation and removal.

**Electrical**

UL8750 and Class 2 Compliant; RoHS Compliant, US only.

Output over voltage, over-current and short circuit protection.

Approved for through-circuit wiring. Max.: (4) 12 AWG (2in/2out).

Pre-wired junction box with convenient screwdriver pry-outs. (4) 1/2" concentric knockouts.

**Lamp**

Light engine consists of a high output multi-chip LED array arranged into a single LED package, enabling precise optical control without requiring lensing to diffuse multiple LED sources.

Excellent fixture-to-fixture color consistency within a 3-step MacAdam Ellipse tolerance.

**Dimming**

All R4RM downlights are available for non-dimming and dimming applications.

For a list of compatible dimmers, refer to [Dimming Specifications](#) sheet.

**Trims**

Specification Grade trims are available in several different styles and finishes for your space. Featuring a high quality Alzak™ finish; optically designed for reduced glare while maintaining maximum lumen output. See "4" LED Recessed Trims" spec sheet for information and details.

**Warranty**

This complete fixture is covered by ConTech's full five (5) year replacement guarantee after date of purchase.


**Labels/Usage**

cCSAus Certified to UL Standards. Suitable for damp locations.

Energy Star certified with the following trims: C4322-PL, C4322-WHT and C4322-CLR (all beam distributions). The -C and -SL options are not Energy Star certified.

eldoLED dimming options are not Energy Star certified.

Assembled in the USA.

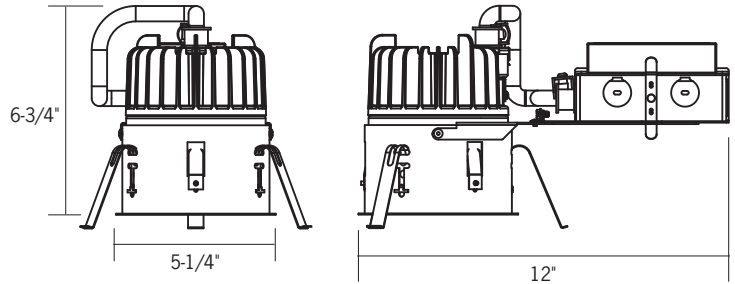

**Ceiling Opening: 4-7/8"**  
**Ceiling Thickness: 1/2" – 5/8"**

	Series 1	Series 2	Series 3	Series 4	Series 5	Series 6
<b>Input Wattage (W)</b>	10	14	20	28	37	43
<b>Input Current (A) 120/277</b>	.08/.04	.12/.06	.17/.08	.23/.11	.31/.14	.36/.17
<b>Input Voltage</b>						
Dimming (Triac, ELV, 0-10V)	120V AC, 50/60Hz					
	277V AC, 50/60Hz					
Lutron HiLume® Dimming	120V AC, 50/60Hz					
Lutron Eco-System® Dimming	120V AC, 50/60Hz					
	277V AC, 50/60Hz					
eldoLED ECOdrive/SOLOdrive/POWERdrive DMX	120V AC, 50/60Hz					
	277V AC, 50/60Hz					
<b>Color Temp</b>	2700K/3000K/3500K/4000K					
<b>CRI Standard/High</b>	83 (80min) / 90+					
<b>Driver</b>						
Power Factor	> 0.90					
THD	< 20%					
<b>Dimming</b>						
Triac, ELV, 0-10V	10-100%					
Lutron®	1-100%					
eldoLED ECOdrive	1-100%					
eldoLED SOLOdrive	0.1-100%					
eldoLED POWERdrive DMX	0-100%					

**Ordering Information**

Example Order:

Housing	LED Series	Color Temp	Electrical	Dimming
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

<b>R4RM</b>	<b>1</b> - 10W, 1000lm <b>2</b> - 14W, 1400lm <b>3</b> - 20W, 2000lm <b>4</b> - 28W, 2600lm <b>5</b> - 37W, 3200lm <b>6</b> - 43W, 3600lm	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K <b>27KC</b> - 2700K, 90+ CRI <b>30KC</b> - 3000K, 90+ CRI <b>35KC</b> - 3500K, 90+ CRI <b>40KC</b> - 4000K, 90+ CRI	<b>12</b> - 120V <b>27</b> - 277V	<b>D<sup>1</sup></b> - Triac, ELV, 0-10V Dimming <b>D3<sup>2</sup></b> - Lutron Hi-lume 1% 2-Wire LED Driver (120V Forward Phase Only) <b>D4</b> - Lutron Hi-lume 1% EcoSystem LED Driver with Soft-on, Fade-to-Black <b>D6<sup>3</sup></b> - eldoLED ECOdrive, 0-10V, 1% Dimming <b>D7<sup>3</sup></b> - eldoLED ECOdrive, DALI, 1% Dimming <b>D8<sup>3</sup></b> - eldoLED SOLOdrive, 0-10V, 0.1% Dimming <b>D9<sup>3</sup></b> - eldoLED SOLOdrive, DALI, 0.1% Dimming <b>DMX<sup>3,4</sup></b> - eldoLED POWERdrive, DMX 0.0% Dimming
-------------	--	--	--------------------------------------	--

1. Triac and ELV dimming for 120V only  
 2. Lutron Hi-Lume dimming only available in 120V  
 3. eldo LED Drivers are programmed for linear curve dimming as standard. For logarithmic curve dimming, please consult factory.  
 4. Verify DMX Driver and Control System compatibility with factory prior to ordering.

Trims


See "4" LED Recessed Trims" sheet for trim information and details.



**Specification Grade Specular Reflector**

Specification grade specular reflector: narrow beam clear, medium beam clear, wide beam clear, platinum, platinum wheat, or white. OD: 5-11/16"; ID: 4-3/8"

Add "C" (clear lens) or "SL" (sandblast lens) after finish code for wet location approved trim.



- C4322N-CLR\*** - Narrow Beam (36°), Clear Reflector
- C4322M-CLR\*** - Medium Beam (54°), Clear Reflector
- C4322W-CLR\*** - Wide Beam (80°), Clear Reflector
- C4322-PL\*** - Platinum Reflector
- C4322-PLWHE\*** - Platinum Wheat Reflector
- C4322-WHT** - White Reflector


\*Available with White Painted Flange, add "-WPF" to part number



**Two Piece Reflector Trim**

Two piece reflector: clear or white upper reflector, clear or platinum lower cone; Includes (1) LF20-CL glass lens. OD: 5-11/16"; ID: 3-1/2"

Approved for dry/damp locations. Approved for wet locations when glass lens is installed.




- C4321-CLR-(CLR,PL)** - Clear Reflector/Clear or Platinum Lower Cone
- C4321-WHT-(CLR,PL)** - White Reflector/Clear or Platinum Lower Cone



**Two Piece Reflector/Baffle Trim**

Two piece reflector: clear or white upper reflector, black or white lower baffle; Includes (1) LF20-CL glass lens. OD: 5-11/16"; ID: 3-1/2"

Approved for dry/damp locations. Approved for wet locations when glass lens is installed.




- C4321-CLR-(B,P)** - Clear Reflector/Black or White Lower Baffle
- C4321-WHT-(B,P)** - White Reflector/Black or White Lower Baffle



**Two Piece Reflector Trim with Lens**

Two piece reflector with lens: Clear or white upper reflector, clear or platinum lower cone; regressed prismatic convex lens, Wet Location Listed. OD: 5-11/16"; ID: 3-7/8"

Wet Location Listed.




- C4327-CLR-(CLR,PL)** - Clear Reflector/Clear or Platinum Lower Cone
- C4327-WHT-(CLR,PL)** - White Reflector/Clear or Platinum Lower Cone



**Two Piece Reflector/Baffle Trim with Lens**

Two piece reflector with lens: Clear or white upper reflector, black or white lower baffle with regressed prismatic convex glass lens; 1-1/2" Regress. Wet Location Listed. OD: 5-11/16"; ID: 3-7/8"

- C4327-CLR-(B,P)** - Clear Reflector/Black or White Lower Baffle
- C4327-WHT-(B,P)** - White Reflector/Black or White Lower Baffle




**Lensed Wall Wash Trim**

Lensed Wall Wash Trim; Clear, Platinum or White Reflector. OD: 5-11/16"; ID: 4"

- C4323-CLR\*** - Clear Reflector
- C4323-PL\*** - Platinum Reflector
- C4323-WHT** - White Reflector

\*Available with White Painted Flange, add "-WPF" to part number



**Floating Glass Trim**

Floating glass disc; clear or white reflector. 1-1/4" Drop from ceiling. Glass OD: 6".



**CTR4325L-(CLR,WHT)-P**



**Floating Glass Ring**

Floating glass ring; clear or white reflector. 1-1/4" Drop from ceiling; 3-1/2" center hole. Glass OD: 6".

**CTR4326L-(CLR,WHT)-P**



**Floating Single Acrylic Ring**

Single floating colored acrylic ring; clear or white reflector. 1-1/2" Drop from ceiling. Acrylic Ring OD: 6"; ID: 4-3/8".

**CTR4324L-(CLR,WHT)-P  
1AR4(B,F,G,R,Y)**



**Floating Double Acrylic Ring**

Stacked floating colored acrylic rings; clear or white reflector. 2-3/4" Drop from ceiling. Acrylic Ring OD: 6"; ID: 4-3/8".

**CTR4324L-(CLR,WHT)-P  
2AR4(B,F,G,R,Y)**



Acrylic Ring Finishes: -B (blue), -F (frosted), -G (green), -R (red), -Y (yellow)



### Multiplication Factors

CCT	STD CRI	HIGH CRI	SERIES 1	SERIES 2	SERIES 3	SERIES 4	SERIES 5	WHT/PL REFLECTORS
2700K	0.94	0.70	0.29	0.39	0.53	0.73	0.90	1.0
3000K	N/A	0.75	0.29	0.39	0.53	0.73	0.90	1.0
3500K	1.0	0.81	0.29	0.39	0.53	0.73	0.90	1.0
4000K	1.0	0.87	0.29	0.39	0.53	0.73	0.90	1.0

### R4NC630K12D/C4322M-CLR

Designed for 50,000 Hour Lamp Life\*; LM-63 Test No. 85098

**Light Output (Fixture Delivered Lumens):** 3603  
**Total Watts@120V:** 43.0  
**Lumens Per Watt:** 83.8  
**Color Rendering Index (CRI)<sup>1</sup>:** 83  
**Color Temperature (CCT)<sup>2</sup>:** 2988K  
**Spectral Power Distribution Chart<sup>3</sup>**

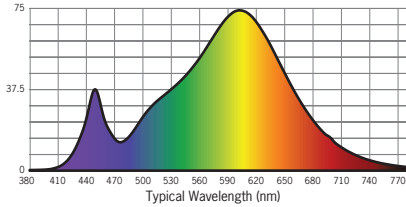

#### Candlepower Summary

FROM 0	CANDELA	LUMENS
0	4747	
5	4706	455
15	4680	1278
25	2956	1316
35	815	514
45	30	24
55	11	11
65	4	4
75	1	1
85	0	0
95	0	

#### Intensity Distribution



DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIAMETER (FT.)
6'	131.9	5.4
8'	74.2	7.2
10'	47.5	9.0
12'	33.0	10.8
14'	24.2	12.6
16'	18.5	14.4

**Beam Distribution:** 54°  
**Spacing Criteria:** 0.82

### R4NC630K12D/C4322N-CLR

Designed for 50,000 Hour Lamp Life\*; LM-63 Test No. 85317

**Light Output (Fixture Delivered Lumens):** 3567  
**Total Watts@120V:** 43.0  
**Lumens Per Watt:** 83.0  
**Color Rendering Index (CRI)<sup>1</sup>:** 82  
**Color Temperature (CCT)<sup>2</sup>:** 3027K  
**Spectral Power Distribution Chart<sup>3</sup>**

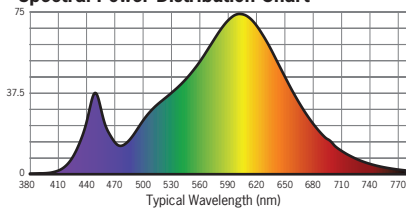

#### Candlepower Summary

FROM 0	CANDELA	LUMENS
0	6579	
5	7684	716
15	5015	1377
25	1967	950
35	780	462
45	46	36
55	18	17
65	6	7
75	2	2
85	0	0
95	0	

#### Intensity Distribution



DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIAMETER (FT.)
6'	182.8	3.9
8'	102.8	5.3
10'	65.8	6.6
12'	45.7	7.9
14'	33.6	9.2
16'	25.7	10.5

**Beam Distribution:** 36°  
**Spacing Criteria:** 0.63

### R4NC630K12D/C4322W-CLR

Designed for 50,000 Hour Lamp Life\*; LM-63 Test No. 84842

**Light Output (Fixture Delivered Lumens):** 3749  
**Total Watts@120V:** 44.4  
**Lumens Per Watt:** 84.4  
**Color Rendering Index (CRI)<sup>1</sup>:** 82  
**Color Temperature (CCT)<sup>2</sup>:** 3025K  
**Spectral Power Distribution Chart<sup>3</sup>**

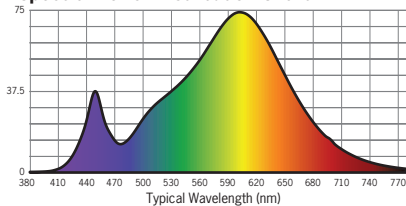

#### Candlepower Summary

FROM 0	CANDELA	LUMENS
0	2248	
5	2256	218
15	2506	701
25	2356	1102
35	2448	1380
45	222	294
55	43	41
65	11	11
75	2	2
85	0	0
95	0	

#### Intensity Distribution



DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIAMETER (FT.)
6'	62.4	8.9
8'	35.1	11.9
10'	22.5	14.9
12'	15.6	17.9
14'	11.5	20.8
16'	8.8	23.8

**Beam Distribution:** 80°  
**Spacing Criteria:** 1.19

### R4NC630K12D/C4322-PL

Designed for 50,000 Hour Lamp Life\*; LM-63 Test No. 85318

**Light Output (Fixture Delivered Lumens):** 3423  
**Total Watts@120V:** 43.0  
**Lumens Per Watt:** 79.6  
**Color Rendering Index (CRI)<sup>1</sup>:** 82  
**Color Temperature (CCT)<sup>2</sup>:** 3033K  
**Spectral Power Distribution Chart<sup>3</sup>**

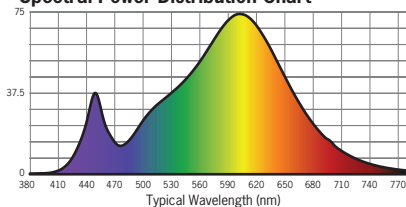

#### Candlepower Summary

FROM 0	CANDELA	LUMENS
0	4582	
5	4309	395
15	3376	949
25	2619	1194
35	1191	725
45	140	116
55	33	33
65	8	9
75	2	2
85	0	0
95	0	

#### Intensity Distribution

DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIAMETER (FT.)
6'	127.3	4.8
8'	71.6	6.4
10'	45.8	8.0
12'	31.8	9.6
14'	23.4	11.3
16'	17.9	12.9

**Beam Distribution:** 57°  
**Spacing Criteria:** 0.80

1. Accuracy of rendering colors  
 2. Color appearance of light source  
 3. Colors present within the light source

\*Dependent on surrounding temperatures