

Sovereign

Architectural Edgelit

EYE APPEAL

Sovereign LED edgelit exit signs set the standard for architectural appeal; always enhancing their surroundings and pleasing even the most discerning eye.

Subtle lines and soft curves create a distinctive “floating” edgelit look. Quality construction includes precision die cast aluminum housings with a unique, crystal clear, laser-formed thin acrylic legend.

The Sovereign has been designed with the latest high efficiency LED light sources to provide vivid pronouncement of its exit legend with exceptional uniformity and luminance levels – 4X the UL requirement.

Engineered for reliability and ease of installation, Sovereign comes in many cost-effective configurations offering superlative quality, performance, and aesthetics.

LED Exit Signs



Recessed Ceiling Mount



Surface Wall Mount




Surface Ceiling Mount




New Flat Trim for Recessed Ceiling Mount



Surface End Mount

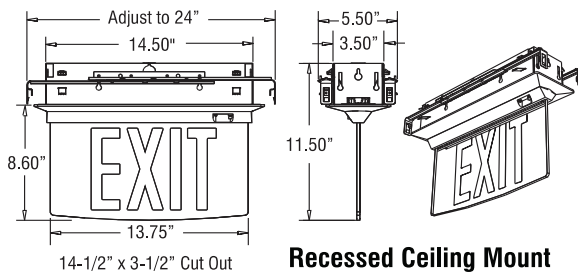


Recessed Ceiling Mount

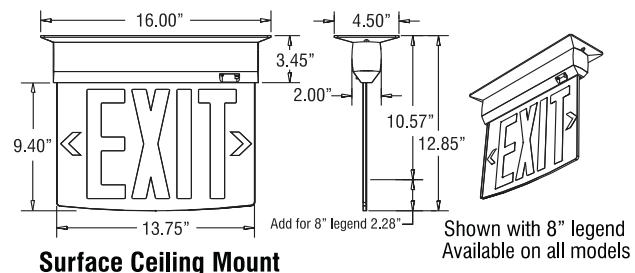


Surface Ceiling Mount


Shown with 8" legend
Available on all models

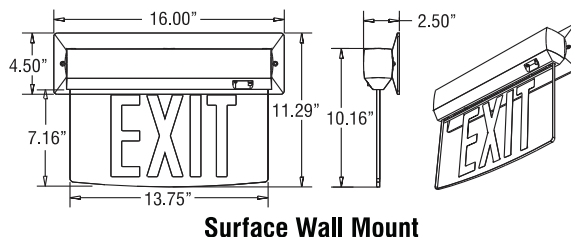

Surface Wall Mount

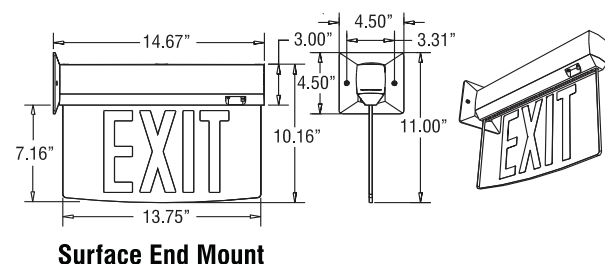

Surface End Mount

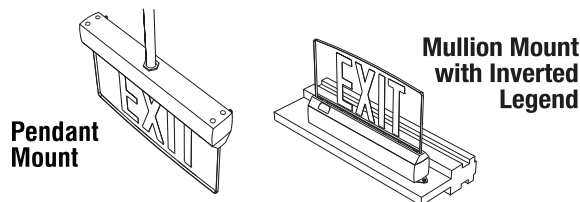

Pendant Mount

Mullion Mount
with Inverted
Legend

Power Consumption			
Type	Volts	Max Watts	Power Factor
RED AC Only	120 / 277	1.5	.70
RED Battery Backup	120 / 277	2.5	.70
RED Battery Backup with Remote	120 / 277	3.0	.73
GREEN AC Only	120 / 277	2.3	.70
GREEN Battery Backup	120 / 277	3.0	.76
GREEN Battery Backup with Remote	120 / 277	4.0	.81



ARRA Compliant
for Levels 1&2



2575 Metropolitan Drive, Trevoze, PA 19053 • USA
TEL: (800) 872 0879 • FAX: (215) 244 4208 • www.evenlite.com

Project name:	Approved By:
Catalog No:	Type No:

Sovereign LED Exit Signs

FEATURES

- Diagnostic Battery Monitoring on all “EM” models
- Maintenance free LED Light source with 25+ years life expectancy
- Contoured crystal clear laser formed edgelit lens
- Refractive light guide engineered to optimize LED utilization and illumination uniformity
- Lens Panel is “Last-to-Assemble” snap-in for versatility and ease of installation
- Full size universal, self-adhesive Chevron arrows with template enable on-site configuration
- Available with a range of information signage or custom graphics to order
- Custom legends with white LED light source available to order
- Precision pressure die cast aluminum legend holder, trim and surface mount housing
- Quality brushed aluminum sealed finish is standard, optional White, Black, brushed painted Brass finishes available. Consult factory for custom finishes.
- Hinged retaining springs eliminate exposed mounting hardware on recessed model
- Modular design provides ease of installation and matching configurations
- Low profile recessed housing is suitable for old or new work installations and is Type IC Rated
- Recessed ceiling back box features universal adjustable mounting brackets with quick-fit retaining clips to suit most ceiling types
- Slimline low profile surface mount housing eliminates need for recessing box in wall mount applications
- Available with Master/Remote combinations
- Battery Diagnostic Circuit monitors battery status, detects cell failure and issues alert of reduced capacity and the need to replace battery
- Unique electronic driver circuit provides current control and protection ensuring optimum LED efficiency and life
- Universal 120/277 VAC field selectable input. All versions feature fully integral electronic components
- Premium long life high temperature rated, fused Nickel Cadmium battery
- Recessed AC Indicator and Test Switch
- Brownout sensing assures emergency illumination during periods of low line voltage
- Self-compensating solid state Constant Current Charger provides extended float life and rapid recharge
- Zero current LVCO ensures positive charge acceptance following extended discharge
- Approved for use in New York City calendar #48851
- UL Listed 3 hour emergency duration standard
- UL 924 Listed by Underwriters Laboratories and meets or exceeds all performance standards as required by NFPA 101, NFPA 70-NEC and OSHA
- 5 year limited warranty

ORDERING GUIDE

SOV							
Model	Operation	Legend Size/ Letter Color	Faces/ Background	Trim/ Housing Color	Mounting	Chevron Direction	Options
SOV	AC AC Only 120/277 VAC EM Battery Backup Emergency	R RED Standard 6" EXIT G GREEN Standard 6" EXIT NR RED 8" EXIT NG GREEN 8" EXIT	1C Single Face, Clear Background (standard) 1M Single Face, Mirror Background 2M Double Face, Mirror Background (Mirror simulates clear background for double face exits) 1W Single Face, White Background 2W Double Face, White Background	BA Brushed Aluminum (standard) WH White Finish BK Black Finish BR Brushed Brass Painted Finish CC Custom Color (specify)	Standard Mounting RC Recessed Ceiling SC Surface Ceiling SW Surface Wall SE Surface End Optional Mounting MM Mullion Mount PA 12 " Swivel Pendant Mount PB 24" Swivel Pendant Mount PC 36" Swivel Pendant Mount PD 48" Swivel Pendant Mount	UC Field Installed Adhesive Chevron Indicators AR Arrow Right EXIT> AL Arrow Left <EXIT AA Double Arrow <EXIT> LR Arrow Left/ Arrow Right <EXIT/EXIT> (Double Face units only) <i>Factory installation of Chevrons is recommended for Double Face Signs</i>	DK Two Circuit Input –Specify Input Voltage (AC Models only) DL Damp location listed EU Euro Legends (Consult factory for full range) F Flash in Emergency Mode (EM Models) or continuous Flash in AC models FA Flash in AC and Emergency mode on 12-24V (AC or DC) normally-off fire alarm signal (Available for AC and EM models) FB FA Option including Buzzer FZ F Option including Buzzer FP Flat Panel (no curve on panel bottom) FT Flat Trim for Recessed Ceiling Mount IN Inverted Legend – Use with Mullion Mount IR Self-Diagnostics with Infrared remote Testing (EM models only) TLRT Infrared hand held Transmitter (order separately) LL High/Low Level Master and Remote (available for AC and EM Models-Remote is Die Cast Exit Razor to match master) SD Self-Test / Self-Diagnostic(EM models Only) VA Other Input Supply Voltage (Consult Factory)

Example: SOV-EM-R-1C-BA-RC-AR-SD-FT