


Project		Catalog #		Type	
Prepared by		Notes		Date	

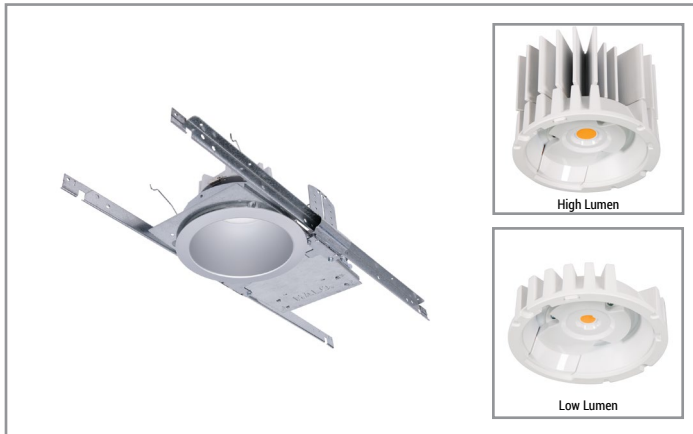

# HALO Commercial

## HC6 | HM6 | 61 | 61PS

6-inch LED new construction/remodel  
regressed lens downlight and wall wash

### Typical Applications

Office • Healthcare • Hospitality • Institutional • Mixed-Use/Retail

### Interactive Menu

- Order Information [page 2](#)
- Product Specifications [page 4](#)
- Photometric Data [page 5](#)
- Energy & Performance Data [page 8](#)
- Product Warranty

### Product Certification




### Product Features

### Top Product Features

- New construction/remodel series; 500 to 4,000 lumens
- Narrow, Medium and Wide distributions; Wall wash with rotatable linear spread lens
- 2700K, 3000K, 3500K and 4000K CCT; 80 or 90 CRI
- Universal voltage 120V-277V; Standard 0-10V driver dims to 1%
- Two retrofit kits install from below ceiling for LED upgrades

### Dimensional and Mounting Details

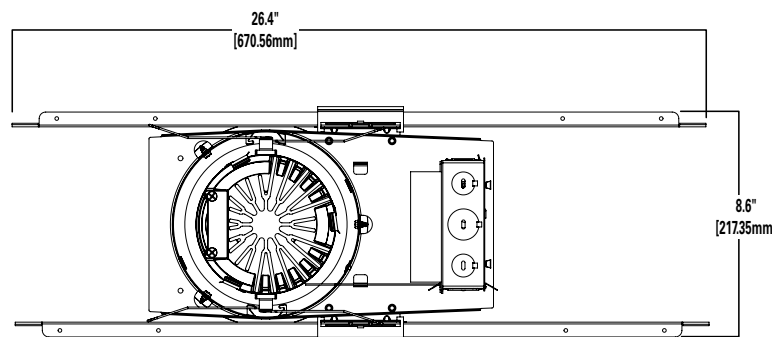

 additional  
product diagrams

## Order Information

Sample Number: HC620D010REM7 – HM612835 - 61MDC

A complete luminaire consists of a housing frame, LED module, and reflector (ordered separately)

Mounting Frame	Lumens	Input / Control	Factory Installed Options	Accessories
<b>HC6</b> = 6" new construction and remodeler housing <b>HC6CP</b> = 6" new construction and remodeler housing, CCEA Chicago Plenum rated	<b>05</b> = 500 lumens (nominal) <b>07</b> = 750 lumens (nominal) <b>10</b> = 1000 lumens (nominal) <b>15</b> = 1500 lumens (nominal) <b>20</b> = 2000 lumens (nominal) <b>30</b> = 3000 lumens (nominal) <b>40</b> = 4000 lumens (nominal)	<b>D010</b> =120-277VAC 50/60Hz 0-10V analog 1% - 100% dimming <b>D010347</b> = 347VAC 50/60Hz 0-10V analog 1%-100% dimming (Canada only) <sup>1</sup>  <b>DLV</b> = Distributed Low Voltage driver, 1%-100% dimming DLV for use with DLVP system only. Refer to DLVP low-voltage power module and DLVP specifications for details. <sup>1</sup>	<b>REM7</b> = 7 watt emergency module with remote test / indicator light, use with D010 only <sup>1</sup> <b>REM14</b> = 14 watt emergency module with remote test / indicator light, use with D010 only <sup>1</sup> <b>IEM7</b> = integral 7 watt emergency module with integral test / indicator light, use with D010 only <sup>1</sup> <b>IEM14</b> = integral 14 watt emergency module with integral test / indicator light, use with D010 only <sup>1</sup> <b>BOD7ST</b> = 7.5 watt Bodine self-test diagnostic emergency module with remote test / indicator light, use with D010 only <sup>1</sup> <b>LWTPD1</b> = factory installed Enlighted wireless tile mount sensor kit, use with D010 only <sup>1</sup> <b>WTA</b> =Factory installed WaveLinX tile mount sensor Kit <sup>1,5</sup>  <b>REM7V</b> = 7 watt emergency module with remote test / indicator light, use with DLV only <sup>1,2</sup> <b>REM14V</b> = 14 watt emergency module with remote test / indicator light, use with DLV only <sup>1,2</sup> <b>IEM7V</b> = integral 7 watt emergency module with integral test / indicator light, use with DLV only <sup>1,2</sup> <b>IEM14V</b> = integral 14 watt emergency module with integral test / indicator light, use with DLV only <sup>1,2</sup>	<b>HB128APK</b> = L channel hanger bar, 26", pair (replacement) <b>RMB22</b> = Adjustable wood joist mounting bars, pair, extend to 22" long <b>HSA6</b> =Slope Adapter for 6" Aperture Housings, Specify Slope (refer to instructions for installation of housing and trim) <b>H347</b> = 347 to 120V step down transformer, 75VA <b>H347200</b> = 347 to 120V step down transformer, 200VA <b>PORLWTPD1</b> = Field installed Enlighted wireless sensor kit, use with D010 only <sup>1</sup> <b>WTA</b> =Factory installed WaveLinX tile mount sensor Kit <sup>1,5</sup>
Notes	Notes	Notes (1) Not available with CP version	Notes (1) Not available with CP version (2) ULus for U.S. only (5) WTA = WaveLinX tile mount sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - Real Time Location Services, use with D010 only (Refer to WaveLinX system specifications)	Notes (1) Not available with CP version (5) WTA = WaveLinX tile mount sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - Real Time Location Services, use with D010 only (Refer to WaveLinX system specifications)

LED Module	Lumens	CRI/CCT
<b>HM6</b> = 6" LED module	<b>05</b> = 500 lumens (nominal), use with HC605* housings <b>07</b> = 700 lumens (nominal), use with HC607* housings <b>12</b> =1000, 1500 and 2000 lumens (nominal), use with HC610*, HC615*, HC620* housings <b>34</b> =3000 and 4000 lumens (nominal), use with HC630*, HC640* housings	<b>827</b> = 80 CRI (minimum), 2700K CCT <b>830</b> = 80 CRI (minimum), 3000K CCT <b>835</b> = 80 CRI (minimum), 3500K CCT <b>840</b> = 80 CRI (minimum), 4000K CCT <b>927</b> = 90 CRI (minimum), 2700K CCT <b>930</b> = 90 CRI (minimum), 3000K CCT <b>935</b> = 90 CRI (minimum), 3500K CCT <b>940</b> = 90 CRI (minimum), 4000K CCT
Notes	Notes	Notes

Reflector	Distribution	Finish	Flange	Accessories
Reflector	Distribution <sup>3</sup>	Finish	Flange	Accessories
<b>61</b> = 6" conical reflector	<b>ND</b> = narrow 55° beam angle 0.97 SC <b>MD</b> = medium 60° beam angle 1.10 SC <b>WD</b> = wide 65° beam angle 1.28 SC <b>RWW</b> = rotatable wall wash with linear spread lens	<b>C</b> = Specular clear <b>H</b> = Semi-specular clear <b>W</b> = White	<b>Blank</b> = Polished flange standard with C & H reflectors <b>Blank</b> = White flange standard with W reflector <b>WF</b> = White flange option available with C & H reflectors	<b>61RWWPK</b> = rotatable wall wash insert for 6" reflector –replacement part kit
Notes	Notes (3) Values are nominal, with specular clear reflector, other finishes and field results may vary.	Notes	Notes	Notes

## Order Information

Baffle	Distribution	Finish	Flange	Accessories
<b>61</b> = 6" baffle reflector	<b>WD</b> = wide 65° beam angle 1.28 SC (nominal) <b>RWW</b> = rotatable wall wash with linear spread lens	<b>BB</b> = Black baffle <b>WB</b> = White baffle	<b>Blank</b> = White flange standard with BB, & WB <b>BF</b> = Black flange option available with BB	<b>61RWWPK</b> = rotatable wall wash insert for 6" reflector –replacement part kit
<b>Notes</b>	<b>Notes</b> (3) Values are nominal, with specular clear reflector, other finishes and field results may vary.	<b>Notes</b>	<b>Notes</b>	<b>Notes</b>

IEM Reflector	Distribution	Finish	Flange	Integral Emergency
<b>61</b> = 6" IEM reflector for integral emergency only	<b>ND</b> = narrow 55° beam angle 0.97 SC <b>MD</b> = medium 60° beam angle 1.10 SC <b>WD</b> = wide 65° beam angle 1.28 SC	<b>C</b> = Specular clear <b>H</b> = Semi-specular clear <b>W</b> = White	<b>Blank</b> = Polished flange standard with C & H reflectors <b>Blank</b> = White flange standard with W reflector <b>WF</b> = White flange option available with C & H reflectors	<b>IEM</b> = Reflector for integral emergency only
<b>Notes</b>	<b>Notes</b> (3) Values are nominal, with specular clear reflector, other finishes and field results may vary.	<b>Notes</b>	<b>Notes</b>	<b>Notes</b>

IEM Baffle	Distribution	Finish	Flange	Integral Emergency
<b>61</b> = 6" IEM baffle reflector for integral emergency only	<b>WD</b> = wide 65° beam angle 1.28 SC (nominal)	<b>BB</b> = Black baffle <b>WB</b> = White baffle	<b>Blank</b> = White flange standard with BB, & WB <b>BF</b> = Black flange option with BB	<b>IEM</b> = Reflector for integral emergency only
<b>Notes</b>	<b>Notes</b> (3) Values are nominal, with specular clear reflector, other finishes and field results may vary.	<b>Notes</b>	<b>Notes</b>	<b>Notes</b>

Reflector	Distribution	Finish	Flange
<b>61PS</b> = 6" non-conductive polymer 'dead front' conical reflector <sup>4</sup>	<b>MD</b> = medium 60° beam angle 1.10 SC (nominal)	<b>W</b> = White	<b>Blank</b> = White flange standard with W reflector
<b>Notes</b> (4) 61PS reflector is for Non-IC environment only, and up to 3000 lumens only.	<b>Notes</b> (3) Values are nominal, with specular clear reflector, other finishes and field results may vary.	<b>Notes</b>	<b>Notes</b>

## Product Specifications

### Housing Frame

- Boat shaped galvanized steel plaster frame with adjustable plaster lip
- Accommodates 1/2" to 1-1/2" thick ceilings
- Installs in new construction or from below the finished ceiling (non-accessible) for remodeling (with mounting bars removed)
- Provided with two remodel clips to secure the frame to the ceiling

### Universal Mounting Bracket

- Adjusts 2" vertically from above and below the ceiling
- Use with the included mounting bars or with 1/2" Electric Metallic Tube (EMT)
- Removable to facilitate remodeling installation from below the finished ceiling

### Mounting Bars

- Captive pre-installed No Fuss™ mounting bars lock to T-grid with screwdriver or pliers
- Centering detents allow for consistent positioning of fixtures

### LED Module

- Proximity phosphors over chip on board LEDs provide a uniform source with high efficiency and no pixilation
- Available in 80 or 90 color rendering index (CRI)
- Color accuracy within 3 SDCM provides color consistency and uniformity
- 90 CRI option: R9>50 (refer to chromaticity information for details)
- Available in 2700K, 3000K, 3500K and 4000K correlated color temperature (CCT)
- Passive thermal management achieves 60,000 hours at 70% lumen maintenance (L70) in insulated ceilings (IC) and non-IC applications
- Integral diffuse lens provides visual shielding
- Integral connector allows quick connection to housing flex

### Lumen Options

- Nominal lumen values
  - o 500 lm
  - o 750 lm
  - o 1000 lm
  - o 1500 lm
  - o 2000 lm
  - o 3000 lm
  - o 4000 lm

### Reflector

- Self-flanged aluminum reflectors available in narrow, medium or wide distribution patterns
- Medium distribution polymer non-conductive matte white reflector may be used to meet local codes for 'dead front' applications (Non-IC, 3,000 lumens max.)
- Wall wash reflector features a rotatable linear spread lens for alignment of vertical illumination
- Reflectors attach to LED module with three speed clamps
- Available in multiple painted or plated finishes

### Reflector/Module Retention

- Reflector/module assembly is securely retained in the housing with two torsion springs

### Driver

- Field-replaceable constant current driver provides low noise operation
- Universal 120-277VAC 50/60Hz input standard
- 347VAC 50/60Hz input option (Canada only)
- Continuous, 1% to 100% dimming with 0-10V analog control
- Optional low-voltage DC driver for use with Distributed Low Voltage Power (DLVP) system

### Emergency Option

- Provides 90 minutes of standby lighting, meeting most life safety codes for egress lighting
- Available with integral or remote charge indicator and test switch
- Available Self-Test (self-diagnostic) with remote charge indicator and test switch

### Connected Lighting Systems Options

- WaveLinx (two options):
  - o Factory installed WaveLinx tile-mount sensor kit includes control module, sensor and cable, allowing use with the comprehensive lighting system
  - o Field installed WaveLinx accessory tile mount sensor kit includes the same components as the factory kit, but sold separately for field installation
  - o WTA WaveLinx tile-mount sensor kit offers daylight dimming, PIR motion sensing control and optional Real Time Location Services (RLTS)  
(Refer to WaveLinx system specifications and application guides for details)
  - o WTA WaveLinx kit includes a control module that mounts on the luminaire electrical junction box via a 1/2" knock-out
  - o The WaveLinx tile-mount sensor features direct-mount spring clips to attach to a ceiling tile and the included mounting bracket allows for installation in an octagon ceiling box
- Enlighted wireless tile-mount sensor and control kit
- Distributed Low Voltage Power (DLVP) system combines power, lighting and controls with ease of installation (refer to DLVP Design Guide at [www.cooperlighting.com](http://www.cooperlighting.com) for details)

### Junction Box

- Galvanized steel junction box
- 20 in³ internal volume excluding voltage barrier
- 25 in³ internal total volume
- Voltage barrier for 0-10V dimming wires (occupies one 1/2" pry-out space)
- Listed for eight #12 AWG (four in, four out) 90°C conductors and feed-thru branch wiring
- Three 1/2" and two 3/4" trade size pry-outs available
- Three 4-port push wire nuts for mains voltage with 1-port for fixture connection

### Compliance

- cULus damp and wet location listed in protected ceilings
- IP20 - Above finished ceiling; IP65 - Below finished ceiling
- Non-Insulated ceiling (Non-IC) rated for 3,000 and 4,000 lumen models (insulation must be kept 3" from top and sides)
- Insulated ceiling (IC) rated for 500, 750, 1,000, 1,500 and 2,000 lumen models and suitable for direct contact with air permeable insulation\* (IC models are also suitable for Non-IC installations)
- Airtight per ASTM-E283-04
- Suitable for use in clothes closets when installed in accordance with the NEC 410.16 spacing requirements
- EMI/RFI emissions FCC CFR Title 47 Part 15 Class B at 120V and Class A at 277V
- Contains no mercury or lead and RoHS compliant
- Photometric testing completed in accordance of IES LM-79-08
- Lumen maintenance projection in accordance of IES LM-80-08 and TM-21-11

### Warranty

- Five year limited warranty, consult website for details. [www.cooperlighting.com/legal](http://www.cooperlighting.com/legal)


\*Not for use in direct contact with spray foam insulation, consult NEMA LSD57-2013

## Photometric Data

[View IES files](#)

### NARROW DISTRIBUTION - SPECULAR CLEAR FINISH, 2000 LUMEN MODEL, 80 CRI, 3500K

NARROW (55° BEAM*)	
Test Number	P285970
Housing	HC620D010
Module	HM612835
Reflector	61NDC
Lumens	1920 Lm
Efficacy	96 Lm/W
SC	0.97
UGR	11.7

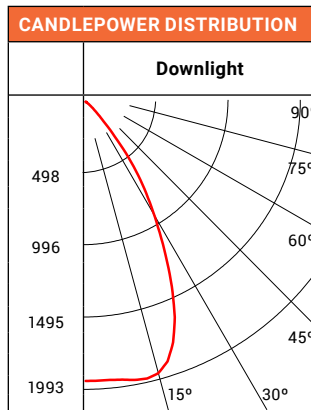

CONE OF LIGHT			
MH	FC	L	W
5.5'	64.9	5.2	5.2
7'	40	6.8	6.8
8'	30.7	7.6	7.6
9'	24.2	8.6	8.6
10'	19.6	9.6	9.6
12'	13.6	11.6	11.6


CANDELA TABLE	
Degrees Vertical	Candela
0	1962
5	1962
15	1975
25	1434
35	671
45	112
55	13
65	3
75	3
85	0
90	0

ZONAL LUMEN SUMMARY		
Zone	Lumens	% Fixture
0-30	1385	72.1
0-40	1796	93.5
0-60	1915	99.7
0-90	1920	100
90-180	0	0
0-180	1920	100

LUMINANCE	
Average Candela Degrees	Average 0° Luminance
45	8706
55	1223
65	337
75	551
85	0

### MEDIUM DISTRIBUTION - SPECULAR CLEAR FINISH, 2000 LUMEN MODEL, 80 CRI, 3500K

MEDIUM (60° BEAM*)	
Test Number	P286170
Housing	HC620D010
Module	HM612835
Reflector	61MDC
Lumens	1959 Lm
Efficacy	97.9 Lm/W
SC	1.10
UGR	11.8

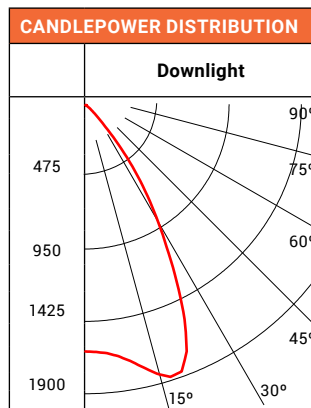

CONE OF LIGHT			
MH	FC	L	W
5.5'	55.2	5.8	5.8
7'	34.1	7.6	7.6
8'	26.1	8.6	8.6
9'	20.6	9.6	9.6
10'	16.7	10.8	10.8
12'	11.6	13	13


CANDELA TABLE	
Degrees Vertical	Candela
0	1642
5	1660
15	1854
25	1576
35	699
45	120
55	15
65	5
75	3
85	0
90	0

ZONAL LUMEN SUMMARY		
Zone	Lumens	% Fixture
0-30	1387	70.8
0-40	1821	93
0-60	1951	99.6
0-90	1959	100
90-180	0	0
0-180	1959	100

LUMINANCE	
Average Candela Degrees	Average 0° Luminance
45	9236
55	1462
65	662
75	551
85	0

## WIDE DISTRIBUTION - SPECULAR CLEAR FINISH, 2000 LUMEN MODEL, 80 CRI, 3500K

WIDE (65° BEAM*)	
Test Number	P286370
Housing	HC620D010
Module	HM612835
Reflector	61WDC
Lumens	2045 Lm
Efficacy	102.3 Lm/W
SC	1.28
UGR	11.6

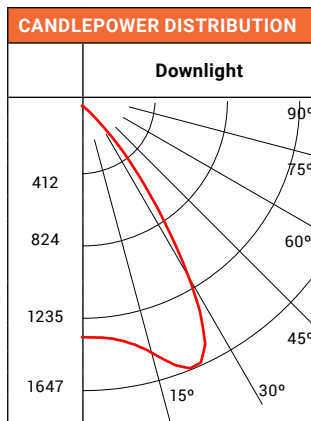

CONE OF LIGHT			
MH	FC	L	W
5.5'	44.3	7	7
7'	27.4	8.8	8.8
8'	21	10.2	10.2
9'	16.6	11.4	11.4
10'	13.4	12.6	12.6
12'	9.3	15.2	15.2

CANDELA TABLE	
Degrees Vertical	Candela
0	1341
5	1349
15	1466
25	1642
35	877
45	201
55	28
65	5
75	2
85	0
90	0

ZONAL LUMEN SUMMARY		
Zone	Lumens	% Fixture
0-30	1282	62.7
0-40	1835	89.7
0-60	2037	99.6
0-90	2045	100
90-180	0	0
0-180	2045	100

LUMINANCE	
Average Candela Degrees	Average 0° Luminance
45	15614
55	2676
65	662
75	530
85	0

\*Value are nominal with specular clear reflectors, other finishes and field results may vary.  
 SC = Spacing Criteria  
 UGR = Unified Glare Rating

## Photometric Multipliers (Nominal Lumen Values)

500 Lumen	750 Lumen	1000 Lumen	1500 Lumen	2000 Lumen	3000 LUMEN	4000 LUMEN
0.32	0.42	0.52	0.72	1.00	1.44	2.02

Multipliers for relative lumen values with other series models.

## Color Finish Multipliers

Finish code	C	H	W/WB	BB
Finish	Specular Clear	Semi-Specular	Matte White White Baffle	Black Baffle
Multiplier	1.00	0.91	0.92	0.84

Multipliers for relative lumen values with other color finishes.

## CCT Multipliers - 80CRI

2700K	3000K	3500K	4000K
0.93	0.95	1.00	1.05

Multipliers for relative lumen values with other series color temperatures.


## CCT Multipliers - 90CRI

2700K	3000K	3500K	4000K
0.75	0.82	0.90	0.89

Multipliers for relative lumen values with other series color temperatures.

## WALL WASH DISTRIBUTION - SPECULAR CLEAR FINISH, 2000 LUMEN MODEL, 80 CRI, 3500K

WALL WASH	
Test Number	P286650
Housing	HC620D010
Module	HM612835
Reflector	61RWWC
Lumens	1798 Lm
Efficacy	89.9 Lm/W
SC	1.23

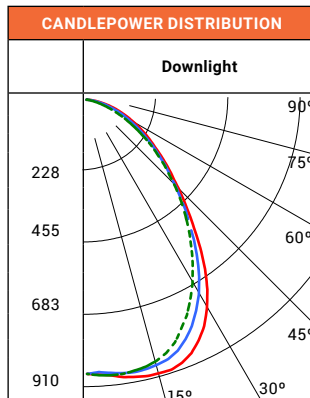

CANDELA TABLE	
Degrees Vertical	Candela
0	882
5	890
15	910
25	854
35	665
45	431
55	270
65	161
75	74
85	10
90	0

ZONAL LUMEN SUMMARY		
Zone	Lumens	% Fixture
0-30	696	38.7
0-40	1079	60
0-60	1629	90.6
0-90	1798	100
90-180	0	0
0-180	1798	100

LUMINANCE	
Average Candela Degrees	Average 0° Luminance
45	33399
55	25825
65	20832
75	15653
85	6416

SC = Spacing Criteria, nominal for specular clear reflector, other finishes and field results may vary.

SINGLE UNIT FOOTCANDLES							
2.5' from wall (distance from fixture along wall)							
	1	2	3	4	5	6	7
1	16.8	12	5.4	2	0.7	0.2	0.1
2	24.7	19.2	10.5	4.9	2.2	1	0.5
3	22.8	18.6	11.4	6.2	3.2	1.7	0.9
4	17.5	15	10.3	6.2	3.6	2	1.2
5	11.9	10.7	8.2	5.5	3.4	2.1	1.3
6	8	7.4	6.1	4.5	3.1	2	1.3
7	5.5	5.2	4.5	3.6	2.6	1.9	1.3
8	3.9	3.7	3.3	2.8	2.2	1.6	1.2
9	2.8	2.7	2.5	2.2	1.8	1.4	1.1
10	2.1	2	1.9	1.7	1.5	1.2	0.9

MULTIPLE UNIT FOOTCANDLES						
2.5' from wall (Distance from fixture along wall)				2.5' from wall (Distance from fixture along wall)		
	1	2	3		1	2
1	18.8	16.6	18.8		17.5	17.5
2	29.5	29.2	29.5		26.8	26.8
3	29	29.8	29		26	26
4	23.7	25.3	23.7		21	21
5	17.4	19.2	17.4		15.4	15.4
6	12.5	13.7	12.5		11.1	11.1
7	9.1	9.8	9.1		8.1	8.1
8	6.7	7.1	6.7		6.1	6.1
9	5	5.3	5		4.6	4.6
10	3.8	4	3.8		3.5	3.5

### Photometric Multipliers (Nominal Lumen Values)

500 Lumen	750 Lumen	1000 Lumen	1500 Lumen	2000 Lumen	3000 LUMEN	4000 LUMEN
0.32	0.42	0.52	0.72	1.00	1.44	2.02

Multipliers for relative lumen values with other series models.

### Color Finish Multipliers

Finish code	C	H	W/WB	BB
Finish	Specular Clear	Semi-Specular	Matte White White Baffle	Black Baffle
Multiplier	1.00	0.91	0.92	0.84

Multipliers for relative lumen values with other color finishes.

### CCT Multipliers – 80CRI

2700K	3000K	3500K	4000K
0.93	0.95	1.00	1.05

Multipliers for relative lumen values with other series color temperatures.

### CCT Multipliers – 90CRI

2700K	3000K	3500K	4000K
0.75	0.82	0.90	0.89

Multipliers for relative lumen values with other series color temperatures.

## Energy &amp; Performance Data

Series	500 lumen		Series	750 lumen		Series	1000 lumen	
Input Voltage 120-277VAC	120V	277V	Input Voltage 120-277VAC	120V	277V	Input Voltage 120-277VAC	120V	277V
Input Current (A)	TBD	TBD	Input Current (A)	TBD	TBD	Input Current (A)	0.085	0.042
Input Power (W)	TBD	TBD	Input Power (W)	TBD	TBD	Input Power (W)	10.1	10.9
In-rush Current (A)	TBD	TBD	In-rush Current (A)	TBD	TBD	In-rush Current (A)	0.644	1.95
In-rush Duration (ms)	TBD	TBD	In-rush Duration (ms)	TBD	TBD	In-rush Duration (ms)	0.125	0.24
THDi (%)	TBD	TBD	THDi (%)	TBD	TBD	THDi (%)	8.6	15.6
PF: $\geq 0.90$ (Nominal input 120-277VAC & 100% of rated output power)			PF: $\geq 0.90$ (Nominal input 120-277VAC & 100% of rated output power)			PF: $\geq 0.90$ (Nominal input 120-277VAC & 100% of rated output power)		
Minimum starting temperature -40°C (-40°F)*			Minimum starting temperature -40°C (-40°F)*			Minimum starting temperature -30°C (-22°F)*		
Sound Rating: Class A standards			Sound Rating: Class A standards			Sound Rating: Class A standards		

Series	1500 lumen		Series	2000 lumen		Series	3000 lumen	
Input Voltage 120-277VAC	120V	277V	Input Voltage 120-277VAC	120V	277V	Input Voltage 120-277VAC	120V	277V
Input Current (A)	0.119	0.055	Input Current (A)	0.176	0.082	Input Current (A)	0.228	0.102
Input Power (W)	14.2	14.9	Input Power (W)	21.1	21.4	Input Power (W)	27.2	27
In-rush Current (A)	0.212	0.85	In-rush Current (A)	0.588	0.624	In-rush Current (A)	0.898	1.7
In-rush Duration (ms)	0.28	0.32	In-rush Duration (ms)	0.3	0.38	In-rush Duration (ms)	0.36	0.38
THDi (%)	7.8	16.3	THDi (%)	8.8	11.2	THDi (%)	9.7	9.3
PF: $\geq 0.90$ (Nominal input 120-277VAC & 100% of rated output power)			PF: $\geq 0.90$ (Nominal input 120-277VAC & 100% of rated output power)			PF: $\geq 0.90$ (Nominal input 120-277VAC & 100% of rated output power)		
Minimum starting temperature -30°C (-22°F)*			Minimum starting temperature -30°C (-22°F)*			Minimum starting temperature -30°C (-22°F)*		
Sound Rating: Class A standards			Sound Rating: Class A standards			Sound Rating: Class A standards		

Series	4000 lumen	
Input Voltage 120-277VAC	120V	277V
Input Current (A)	0.345	0.15
Input Power (W)	41.3	40.7
In-rush Current (A)	1.05	2.23
In-rush Duration (ms)	0.32	0.34
THDi (%)	10.06	14.01
PF: $\geq 0.90$ (Nominal input 120-277VAC & 100% of rated output power)		
Minimum starting temperature -30°C (-22°F)*		
Sound Rating: Class A standards		

## Notes:


\* Emergency Battery packs are rated for a minimum starting temperature of 0°C.




## Energy & Performance Data

### COLOR METRICS - TM-30-15 & CRI/CIE (3500K)

#### 80 CRI Color Metric Summary - 3500K\*

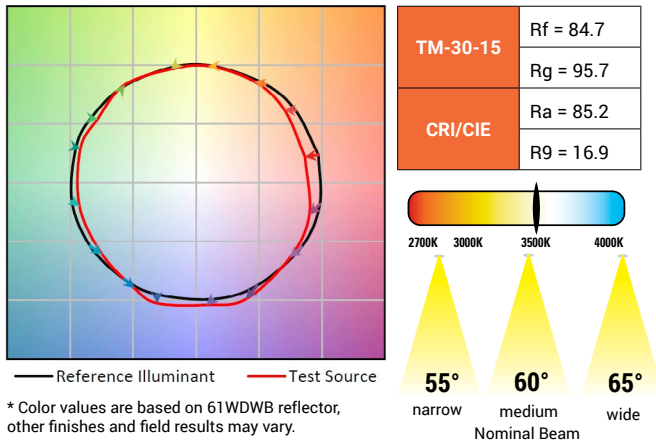


#### 90 CRI Color Metric Summary - 3500K\*

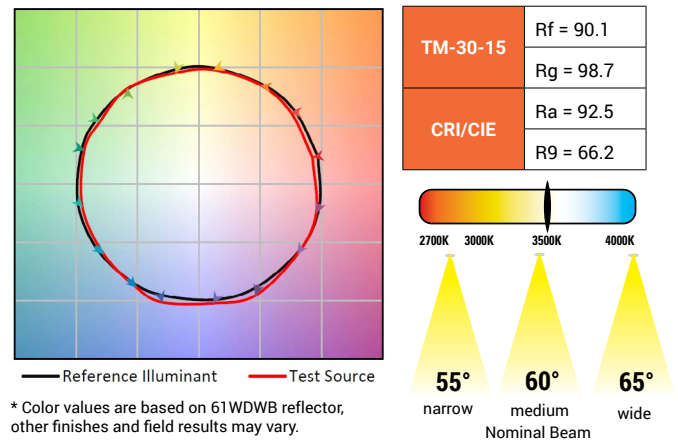


## Dimensional and Mounting Details

### NEW CONSTRUCTIONS - HIGH LUMEN 3000 AND 4000 LUMEN

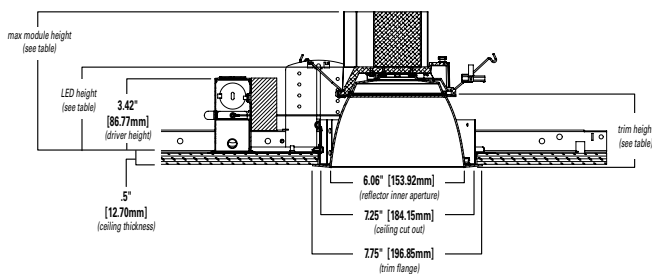

### NEW CONSTRUCTIONS - LOW LUMEN 1000, 1500, AND 2000 LUMEN

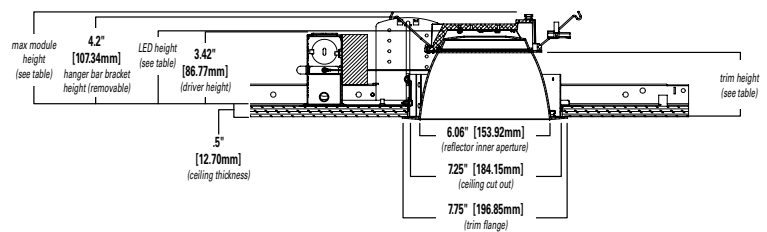

#### High Lumen (3000 & 4000 Lumens)

Distribution	Max. Module Height	Trim Height	LED Height
Narrow	6.6"	3.4"	3.8"
Medium	6.7"	3.5"	3.9"
Wide	6.5"	3.3"	3.7"
Baffle	6.5"	3.3"	3.7"

#### Low Lumen (500, 750, 1000, 1500 & 2000 Lumens)\*

Max. Module Height	Trim Height	LED Height
4.5"	3.4"	3.8"
4.6"	3.5"	3.9"
4.4"	3.3"	3.7"
4.4"	3.3"	3.7"

\*Max. height w/hanger bar bracket 4.2"