

Specification Sheet

Project Name:

Specifier Name & Location:

Quantity/Type:



Drum 23" Pendant | P52314

Lumetta's top-quality collection of drum pendants and surface mounts are available in a range of diameters, heights, and lamping options. Fitted with any Lumenate® selection, the only limit is one's imagination.

Included:

- Canopy finished to match frame
- Three Suspension Cables
- 6' black or white cord
- LTW top lens white acrylic
- LBW bottom lens etched white acrylic
- Lumenate® washable diffuser
- Welded steel/aluminum
- Mounts to standard J-box
- Suitable for damp locations

Weight: 8 lbs

 Made In America



Stem

Cord Color

Black
White


Finish

[View Choices](#)

F2 Chrome
F3 Black
F4 Earth
F5 Copper
F6 Brass
F7 Bronze
F8 Steel
F10 Hammered Copper
F11 White

Lumenate® Diffuser

[View Choices](#)

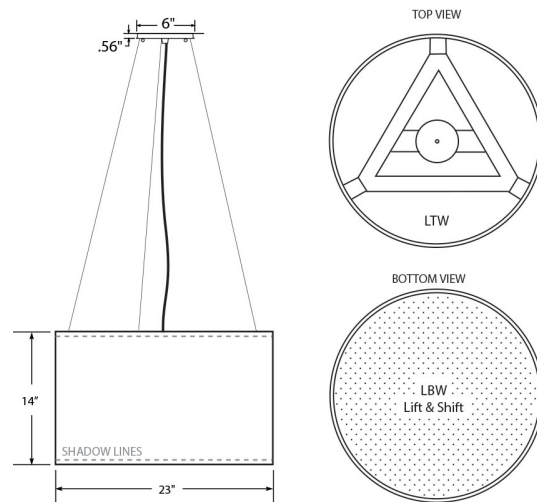

PW52315F4D993L178
PENDANT
23" FUSCHIA DRUM PENDANT



Lamping

L412-LED 4280 Source Lumens 42W (0-10V 1% UNV or 120V Phase)
L413-LED 4410 Delivered Lumens 63 W (0-10V 1% UNV or 120V Phase)
INC 3/Med. Base (lamp not included)

Voltage

120V
277V

Color Temperature

†CCT 3000K Dim-Warm
†CCT BIOS 3000K
†CCT BIOS 3500K
†CCT BIOS 4000K
CCT 2200K CRI 90
CCT 2700K CRI 90
CCT 3000K CRI 90
CCT 3250K CRI 90
CCT 3500K CRI 90
CCT 4000K CRI 90
CCT 5000K CRI 90

+Options

Suspension

A200 - wall mount arc 34"
CXS3 - cord braided silver (not LED)
CXX3 - cord extra (specify length)
STM - Field cuttable ball swivel stem with 1.78" deep canopy. Specify length in 1' increments.

Top Lenses

LTC3 - top lens clear acrylic
LTO3 - top lens opaque
LTY3 - top lens metal perf.

LED

†BTW - Bluetooth Wireless Dimming
†ELDO - eldoLED Dimming
†ELDO - eldoLED Dimming (remote mount)
EMR - Remote emergency battery backup.
Requires stem or 2 power cords.

Canopy

[View Choices](#)

C1010 - square canopy 10"
C66 - square canopy 6"
CAC - canopy alternative color
CF105 - flair canopy 10.5" dia.
Cluster Canopies - See website for a variety of sizes and options. *Specify arrangement and heights.
CSF105 - flair swivel canopy 10.5" dia.

Bottom Lenses

LBA3 - bottom lens applied Lumenate®
LBY3 - bottom lens metal perf.

Revit Files

P52314.rfa
Lumetta Revit Materials Library.zip
Lumetta Revit Readme.txt

IES/TM30 Files

P52314 LED TM-30.pdf
P52314 LED.pdf
P52314 LED.ies
P52314 LED Xicato (original).pdf
P52314 LED Xicato (original).ies