

**DESCRIPTION**

The Encounter™ redefines ambient lighting by being the first fixture to blend modern contemporary styling with the innovative WaveStream™ technology to deliver exceptional performance and superior energy savings. Encounter's highly efficient LED system with advance optical design delivers an unparalleled combination of optimal light uniformity for enhanced visual comfort and superior efficiency for greater energy savings.

Encounter is compatible with all of today's popular ceiling systems and available in a variety of configurations for application versatility. Its perfect balance of form and function make it an ideal choice for commercial office spaces, schools, hospitals, retail and other indoor ambient applications.

<b>Catalog #</b>	<b>22ENLD134UNVELL835CD1U</b>	<b>Type</b>	
<b>Project</b>		<b>Date</b>	
<b>Comments</b>			
<b>Prepared by</b>			

**SPECIFICATION FEATURES**

**Construction**

Shallow 3-1/4" deep housing is extruded aluminum frame and injected molded composite end plates. End plates are securely attached with screws for strength and rigidity and the elimination of gaps. End plates have accessory grid-lock feature for safety and convenience. Four auxiliary fixture end suspension points are provided. Large access plate for supply connection.

**Controls**

The Encounter LED is Powered by Fifth Light, with standard a 0-10V continuous dimming driver that works with any 0-10V control/dimmer. Or, go digital with the Digital Addressable Lighting Interface (DALI) drivers, dimmable down to 1% using the HD option. Combine with energy-saving products like occupancy sensors, daylighting controls, and lighting relay panels from Cooper Controls ([www.coopercontrol.com](http://www.coopercontrol.com)) to maximize energy savings.

**Electrical**

Long-life LED system coupled with electrical driver to deliver optimal performance. LED's available in 3000K, 3500K or 4000K with a typical CRI ≤ 85. Projected life is 60,000 hours at 85% lumen output. Electronic drivers are available for 120-277V applications.

**Driver Access**

Drivers can be accessed via plenum.

**Finish**

Durable frame has high reflectance baked matte white enamel finish for luminous uniformity.

**Optics**

Precision formed optical assembly with positively retained high optical grade acrylic lenses provide a directed optical distribution using WaveStream technology.

**Compliance**

Components are UL recognized. Indoor luminaires are cULus and CSA listed for 25° C ambient environments, RoHS compliant, and comply with IESNA LM-79. LEDs comply with LM-80 standards. DesignLights™ Consortium Qualified. Refer to [www.designlights.org](http://www.designlights.org) Qualified Products List under Family Models for details.

**Warranty**

Five year warranty.




**22EN LED**

**2' X 2' TROFFER LED MODULE**


Specification Grade Troffer




powered by  
**fifthlight**  
 technology

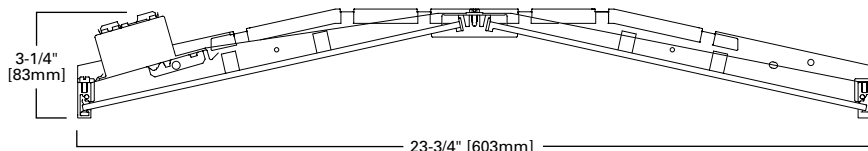

**MOUNTING DATA**



**LAMP CONFIGURATIONS**



**CEILING COMPATIBILITY**

G	F	Ceiling Type	Trim Type
Grid/Lay-in Standard	Drywall Frame Kit	Exposed Grid	G
		Concealed T	G or T
		Slot Grid	G or T
		Flange	*

**CERTIFICATION DATA**

cULus - 1598 and 2043\*\*  
 Lamp Location Listed  
 CSA  
 IC Rated  
 LM79/LM80 Compliant  
 ROHS Compliant  
 DesignLights™ Consortium Qualified  
 Title 24


\*See Drywall Frame Kit Accessory in Ordering Information section.

\*\*Fixture construction is suitable for use in Air-handling and plenum rated spaces in accordance with Section 300.22 (C) of the National Electrical Code, Section 4.3.11.2.6.5 of NFPA 90A and Section 602.2.1.4 of ICC.

**LINEAR DISCONNECT**  
 Safe and convenient means of disconnecting power




PHOTOMETRICS



**22EN-LD1-25-UNV-L835-CD1-U**  
 Electronic Driver  
 Linear LED 3500K  
 Spacing criterion:  
 (II) 1.2 x mounting  
 height, (⊥) 1.3 x  
 mounting height  
 Lumens: 2537  
 Input Watts: 25.5W  
 Efficacy: 100 LPW  
 Test Report:  
 22EN-LD1-25-UNV-  
 L835-CD1-U.IES

Candlepower

Angle	Along II	45°	Across ⊥
0	850	850	850
5	847	847	850
10	836	836	842
15	818	820	828
20	795	796	808
25	764	767	780
30	727	730	746
35	686	688	706
40	637	640	658
45	586	588	606
50	529	531	547
55	469	465	483
60	401	396	414
65	332	324	343
70	260	255	253
75	185	178	152
80	114	96	104
85	42	43	44
90	0	0	0



**22EN-LD1-34-UNV-L835-CD1-U**  
 Electronic Driver  
 Linear LED 3500K  
 Spacing criterion:  
 (II) 1.2 x mounting  
 height, (⊥) 1.3 x  
 mounting height  
 Lumens: 3424  
 Input Watts: 34.9W  
 Efficacy: 98 LPW  
 Test Report:  
 22EN-LD1-34-UNV-  
 L835-CD1-U.IES

Candlepower

Angle	Along II	45°	Across ⊥
0	1156	1156	1156
5	1152	1150	1156
10	1136	1137	1144
15	1111	1112	1123
20	1078	1079	1094
25	1035	1037	1055
30	984	986	1007
35	927	929	952
40	861	865	887
45	791	791	815
50	715	712	738
55	630	626	649
60	542	534	558
65	449	439	463
70	346	342	345
75	247	238	204
80	152	129	139
85	57	58	58
90	0	0	0

Coefficients of Utilization

rc rw RCR	Effective floor cavity reflectance 20%																							
	80%				70%				50%				30%				10%				0%			
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						
1	109	104	99	95	106	101	97	94	97	94	91	93	90	88	90	87	85	83						
2	98	90	83	77	96	88	82	76	85	79	74	81	77	73	78	74	71	69						
3	90	79	71	64	87	77	70	63	74	68	62	71	66	61	69	64	60	58						
4	82	70	61	54	80	68	60	54	66	59	53	63	57	52	61	56	51	49						
5	75	62	53	46	73	61	52	46	59	51	45	57	50	45	55	49	44	42						
6	69	56	47	40	67	55	46	40	53	45	40	51	45	39	50	44	39	37						
7	64	51	42	35	63	50	41	35	48	41	35	47	40	35	45	39	34	32						
8	60	46	37	32	58	45	37	31	44	37	31	43	36	31	42	35	31	29						
9	56	42	34	28	54	42	34	28	40	33	28	39	33	28	38	32	28	26						
10	52	39	31	26	51	38	31	26	37	30	25	36	30	25	36	30	25	23						

Coefficients of Utilization

rc rw RCR	Effective floor cavity reflectance 20%																							
	80%				70%				50%				30%				10%				0%			
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						
1	109	104	99	95	106	101	97	94	97	94	91	93	91	88	90	87	85	83						
2	98	90	83	77	96	88	82	76	85	79	75	81	77	73	78	75	71	69						
3	90	79	71	64	87	77	70	63	74	68	62	72	66	61	69	64	60	58						
4	82	70	61	54	80	68	60	54	66	59	53	63	57	52	61	56	51	49						
5	75	62	53	46	73	61	52	46	59	51	46	57	50	45	55	49	45	42						
6	69	56	47	40	67	55	46	40	53	45	40	51	45	39	50	44	39	37						
7	64	51	42	36	63	50	41	35	48	41	35	47	40	35	45	39	35	33						
8	60	46	38	32	58	45	37	31	44	37	31	43	36	31	42	35	31	29						
9	56	42	34	28	54	42	34	28	41	33	28	39	33	28	38	32	28	26						
10	52	39	31	26	51	38	31	26	37	30	26	37	30	25	36	30	25	23						

Zonal Lumen Summary

Zone	Lumens	%Fixture
0-30	667	26.3
0-40	1100	43.4
0-60	1976	77.9
0-90	2537	100.0
0-180	2537	100.0

Luminance Data

Angle in Deg	Average 0-Deg cd/sm	Average 45-Deg cd/sm	Average 90-Deg cd/sm
45	2229	2237	2305
55	2200	2181	2265
65	2113	2062	2183
75	1923	1850	1580
85	1296	1327	1358

Zonal Lumen Summary

Zone	Lumens	%Fixture
0-30	904	26.4
0-40	1489	43.5
0-60	2669	77.9
0-90	3424	100.0
0-180	3424	100.0

Luminance Data

Angle in Deg	Average 0-Deg cd/sm	Average 45-Deg cd/sm	Average 90-Deg cd/sm
45	3009	3009	3100
55	2955	2936	3044
65	2858	2794	2947
75	2567	2474	2120
85	1759	1790	1790

LUMEN MAINTENANCE

Ambient Temperature	TM-21 Lumen Maintenance (60,000 hours)	Theoretical L70 (Hours)
25°C	> 85%	>163,000


ENERGY AND PERFORMANCE DATA BY CATALOG NUMBER

Stock or MTO*	Catalog Logic	Delivered Lumens	Watts	Efficacy (LPW)
MTO	22EN-LD1-19-UNV-L830-CD1-U	1903	18.8	101
MTO	22EN-LD1-19-UNV-L835-CD1-U	1936	18.7	104
MTO	22EN-LD1-19-UNV-L840-CD1-U	1955	18.8	104
MTO	22EN-LD1-25-UNV-L830-CD1-U	2487	25.5	97
Stock	22EN-LD1-25-UNV-L835-CD1-U	2537	25.5	99
Stock	22EN-LD1-25-UNV-L840-CD1-U	2627	25.5	103
MTO	22EN-LD1-30-UNV-L830-CD1-U	2907	30.3	96
MTO	22EN-LD1-30-UNV-L835-CD1-U	3002	30.4	99
MTO	22EN-LD1-30-UNV-L840-CD1-U	3072	30.3	102
MTO	22EN-LD1-34-UNV-L830-CD1-U	3276	34.8	94
Stock	22EN-LD1-34-UNV-L835-CD1-U	3424	34.9	98
Stock	22EN-LD1-34-UNV-L840-CD1-U	3466	34.8	100
MTO	22EN-LD1-39-UNV-L830-CD1-U	3799	41.6	91
MTO	22EN-LD1-39-UNV-L835-CD1-U	3915	41.7	94
MTO	22EN-LD1-39-UNV-L840-CD1-U	4018	41.7	96
MTO	22EN-LD1-43-UNV-L830-CD1-U	4207	47.4	89
MTO	22EN-LD1-43-UNV-L835-CD1-U	4396	47.6	92
MTO	22EN-LD1-43-UNV-L840-CD1-U	4452	47.4	94

\*Made to order (MTO) requires a four week lead time.

ORDERING INFORMATION

SAMPLE NUMBER: 22EN-LD1-34-UNV-L835-CD1-U

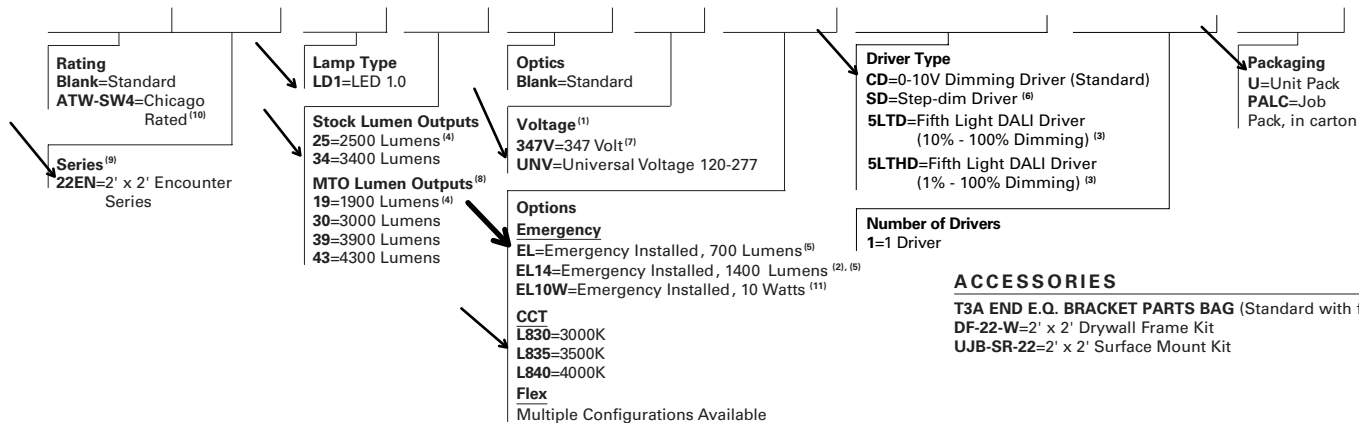

ACCESSORIES

- T3A END E.Q. BRACKET PARTS BAG (Standard with fixture)
- DF-22-W=2' x 2' Drywall Frame Kit
- UJB-SR-22=2' x 2' Surface Mount Kit

NOTES: <sup>(1)</sup>Products also available in non-US voltages and frequencies for international markets. <sup>(2)</sup>Must specify voltage (120V or 277V) when selecting EL option. <sup>(3)</sup>For a complete listing of Fifth Light Technology products and other solutions from Cooper Controls, visit www.coopercontrol.com. <sup>(4)</sup>1900 and 2500 lumen option are not available with a Fifth Light DALI (5LTD) driver. <sup>(5)</sup>EL test switch and light must be remote mounted. EL700 option requires standard switch box. <sup>(6)</sup>Step-dim driver not available with 1900, 2500 and 3000 lumen option. <sup>(7)</sup>347V emergency option not available. <sup>(8)</sup>Made-to-order (MTO) requires four week lead time. <sup>(9)</sup>DesignLights™ Consortium Qualified (all lumen packages). Refer to www.designlights.org Qualified Products List under Family Models for details. <sup>(10)</sup>Chicago rated version does not allow for row mounting. <sup>(11)</sup>For delivered lumens, take lumens per watt of desired fixture and multiply by 10 watts (100 lp/W x 10 = 1000 lumens delivered).

Specifications & dimensions subject to change without notice. Consult your Cooper Lighting Representative for availability and ordering information.

SHIPPING DATA

Catalog No.	Wt.
22EN-LD1-25	14 lbs.
22EN-LD1-34	14 lbs.