
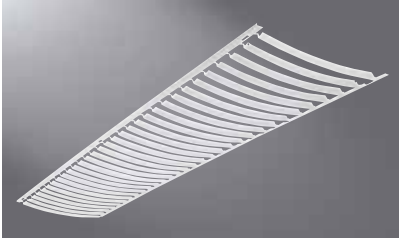



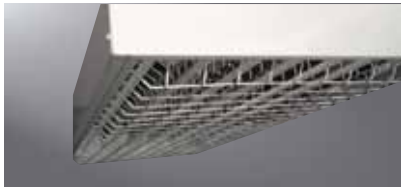





## F-BAY I5, I8 DOOR FRAMES AND WIREGUARDS

**METALUX®**

	Designation	Description
<b>Open</b> 	<b>Blank=</b> No Guard	For maximum light output
<b>I5 / I8 Lens</b> <b>Frosted Acrylic Lens</b> 	<b>I5-FRM/LENS=</b> Frosted Acrylic Lens and Frame (use with general distribution reflector, I5 only)  <b>I8-FRM/FL PK=</b> Frosted Acrylic Lens and Frame (use with general distribution reflector, I8 only)  <b>I5-FRM/CL PK=</b> Clear Acrylic Lens and Frame (use with general distribution reflector, I5 only)  <b>I8-FRM/CL PK=</b> Clear Acrylic Lens and Frame (use with general distribution reflector, I8 only)	Lens in white door frame with "Herringbone" patterned end rail
<b>I5/I8 Wireguard</b> <b>Heavy Duty Wireguard</b> 	<b>WG/I5-4FT-B=</b> Four Foot (4') Heavy Duty Wireguard (for I5)  <b>WG/I8-4FT-B=</b> Four Foot (4') Heavy Duty Wireguard (for I8)	Finished in White. Can be used alone or in combination with other shielding
<b>I5/I8 Baffle</b> <b>TBW</b> 	<b>90800PPK BAFFLE 4FT I5 WITH HDW (WHITE)=</b> Four Foot (4') Thin Blade White Baffle (for I5)  <b>BAFFLE 4FT I8 (WHITE) 11571919=</b> Four Foot (4') Thin Blade White Blade Baffle (for I8)	Thin Blade White Baffle with twenty-three Degree (23°) longitudinal shielding
<b>I5/I8 Louver</b> <b>Asymmetric Louver</b> 	<b>90801P PK=</b> Asymmetric Directional Louver (use with general distribution reflector)	Can be oriented in either direction for flexibility



HBI Lens and Wireguard	Designation
<b>Prismatic and Clear Acrylic Lens</b> 	<b>HBI-FRM/LENS PK</b> = Prismatic Acrylic Lens and Door Frame for HBI
	<b>HBI-FRM/CL PK</b> = Clear Acrylic Lens and Door Frame for HBI
<b>Wireguard</b> 	<b>HBI-FRM/WG PK</b> = Frame and Wireguard for HBI
	<b>HBI-FRM/LENS/WG PK</b> = Frame and Prismatic Acrylic Lens with Wireguard for HBI
	<b>HBI-FRM/CL/WG PK</b> = Frame and Clear Lens with Wireguard for HBI
<b>Drop Wireguard</b> 	<b>HBI-FRM/DROP/WG PK</b> = Frame and Drop Wireguard for HBI
	<b>HBI-FRM/CL/DROP/WG PK</b> = Drop Wireguard, Clear Acrylic Lens and Door Frame for HBI
<b>Heavy Duty Stock Wireguard</b> 	<b>SWG/HBI-4FT-B</b> = Heavy Duty Wireguard for Field Installation
HBL Wireguard	Designation
<b>Wireguard</b> 	<b>WG-HBL6-4FT-B</b> = Field Installable, Wireguard for HBL 4 and 6 Lamp
	<b>WG-HBL8-4FT-B</b> = Field Installable, Wireguard for HBL 8 and 10 Lamp
HBE Door Frame	Designation
<b>HBE Door Frame</b> 	<b>HBE-___-FRM/LENS WDF PK</b> = Prismatic Acrylic Lens and Extruded Aluminum Door Frame <sup>1</sup>
	<b>HBE-___-FRM/CL WDF PK</b> = Clear Acrylic Lens and Extruded Aluminum Door Frame <sup>1</sup>
	<b>HBE-___-FRM/LENS/WG WDF PK</b> = Four (4) and Six (6) Lamp Frame and Prismatic Lens with Wireguard <sup>1</sup>
	<b>HBE-___-FRM/LENS/WG PK</b> = Eight (8) and Ten (10) Lamp Frame and Prismatic Lens with Wireguard <sup>1</sup>
	<b>HBE-___-FRM/CL/WG PK</b> = Four (4) and Six (6) Lamp Frame and Clear Acrylic Lens with Wireguard <sup>1</sup>
	<b>HBE-___-FRM/CL/WG WDF PK</b> = Eight (8) and Ten (10) Lamp Frame and Clear Acrylic Lens with Wireguard <sup>1</sup>

NOTES: 1. Specify "4/6LT" or "8/10LT" when ordering HBE Door Frame accessories.

