



14PAR38LED840F40DIMULW120V



LED PAR38

14PAR38/LED/840/F40/DIM/ULW/120V 6/1FB


Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.

Product data

General Information		Starting Time (Nom)		0.5 s
Base	E26 [Single Contact Medium Screw]	Warm Up Time to 60% Light (Nom)	0.5 s	
EU RoHS compliant	Yes	Power Factor (Nom)	0.9	
Nominal Lifetime (Nom)	25000 h	Voltage (Nom)	120 V	
Switching Cycle	25000X	Temperature		
Technical Type	14-120W	T-Case Maximum (Nom)	70 °C	
Light Technical		Controls and Dimming		
Color Code	841 [CCT of 4100K (841)]	Dimmable	Yes	
Beam Angle (Nom)	40 °	Approval and Application		
Initial lumen (Nom)	1200 lm	Suitable For Accent Lighting	Yes	
Luminous Intensity (Nom)	2500 cd	Product Data		
Color Designation	Cool White (CW)	Order product name	14PAR38/LED/840/F40/DIM/ULW/120V 6/1FB	
Correlated Color Temperature (Nom)	4000 K	EAN/UPC - Product	046677529604	
Luminous Efficacy (rated) (Nom)	85.00 lm/W	Order code	529602	
Color Consistency	<6	Numerator - Quantity Per Pack	1	
Color Rendering Index (Nom)	80	Numerator - Packs per outer box	6	
LLMF At End Of Nominal Lifetime (Nom)	70 %	Material Nr. (12NC)	929001319104	
Operating and Electrical		Net Weight (Piece)	0.385 kg	
Input Frequency	50 to 60 Hz			
Power (Rated) (Nom)	14 W			
Lamp Current (Nom)	120 mA			
Wattage Equivalent	120 W			

LED PAR38


Dimensional drawing




Classic PAR38 120V 14-120W 1200lm 40D 40

Product	D	C
14PAR38/LED/840/F40/DIM/ULW/120V 6/1FB	122 mm	134 mm


Photometric data



14-120W E26 PAR38 40D 840 4000K





14-120W E26 PAR38 40D 840 4000K

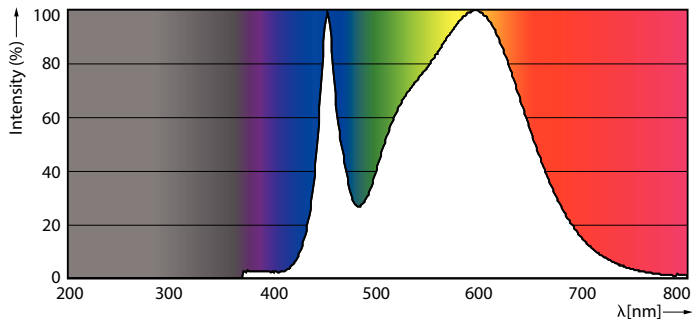

14-120W E26 PAR38

LED PAR38

Lifetime

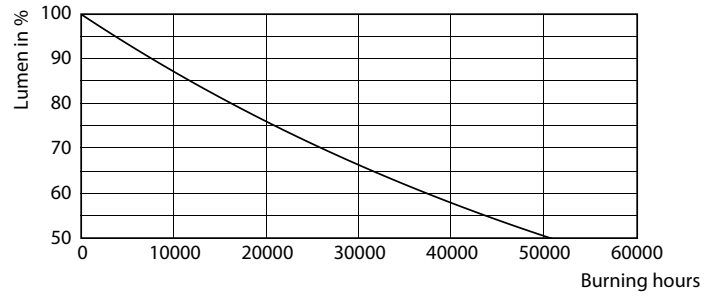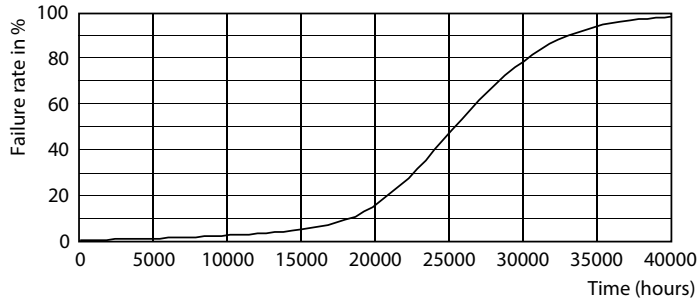

14-120W E26 PAR38

14-120W E26 PAR38

