

SS2258P

Ballast Type:	Electromagnetic
Input Voltage:	120VAC+5%,-10%
Input Frequency:	60 Hz.

Starting Method:	Preheat Self Start
Lamp Connection:	Parallel
Unit Color:	Black

Unit Weight:	2.1 lb.
Carton Quantity:	30
Skid Quantity:	960

ELECTRICAL SPECIFICATION:

[illegible]

PERFORMANCE:

- Electromagnetic reactor type ballast
- Preheat self start
- Normal power factor
- Parallel operation
- Encased & potted
- Sound rated A
- Meets ANSI standard C82.1

APPLICATION:


- Maximum case temperature: 194°F/90°C
- Maximum ambient temperature: 104°F/40°C
- Minimum starting temperature: 50°F/10°C
- Lamp starts: > 6,000 starts
- Remote mounting: 10 ft.

SAFETY:

- UL/935 (Class P, Type HL, Type 1 outdoor) listed
- CSA/C22.2 certified
- Automatic reset thermal protector
- No PCB's

STYLE:


9

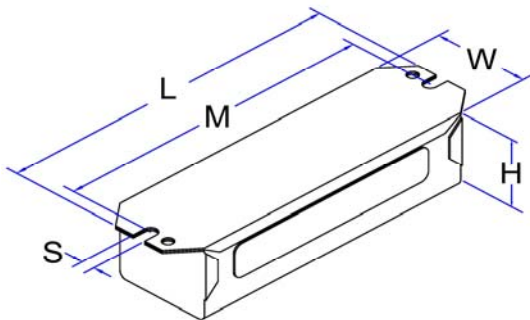

H	W	L	M	S
1 13/32	1 29/32	6 7/16	6	1/4
1.41	1.91	6.44	6.00	0.25
3.58cm	4.85cm	16.36cm	15.24cm	0.64cm

WIRING DIAGRAM:

019

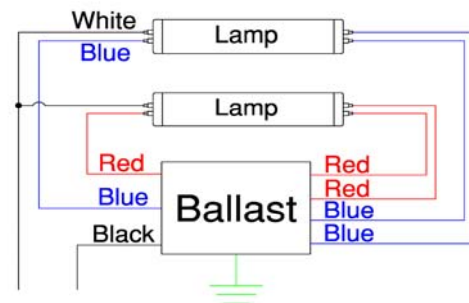

Standard lead lengths:

- Blk: 15"
- Red: (3) 15"
- Blu: (3) 15"

* 3/8" Strip

WARRANTY

Robertson Worldwide warrants to the purchaser that this ballast will be free from defects in material or workmanship for a period of 2 years from date of manufacture when properly installed and under normal conditions of use. For more information on Robertson Worldwide's ballasts, call 1-800-323-5633 or visit www.robertsonww.com. Specifications subject to change without notice.

Revised 11/17/06

ROBERTSON WORLDWIDE

13611 Thornton Rd, Blue Island, IL 60406, TEL: 1-800-323-5633, FAX: 1-877-388-2420, www.robertsonww.com