



# NLU435T51S-ROHS

Programmed Instant Start Electronic

## APPLICATION AND PERFORMANCE SPECIFICATION

**Description:** (NU435T51S) - T5 Fluorescent Ballast:

- Line Voltage: 120 - 347v
- Programmed Instant Start Electronic

|           |           |           |           |
|-----------|-----------|-----------|-----------|
| 3 x F14T5 | 3 x F21T5 | 3 x F28T5 | 3 x F35T5 |
| 4 x F14T5 | 4 x F21T5 | 4 x F28T5 | 4 x F35T5 |

Application and Performance Specification Information Subject to Change without Notification.



**Application:**

Min. Start Temp: -10°C  
 Remote Mounting:  
 Mounting Style: Mounting Feet  
 Ballast Type: Electronic

**Dimensions:**

9.5 X 2.3 X 1.46 in.

**Safety:**

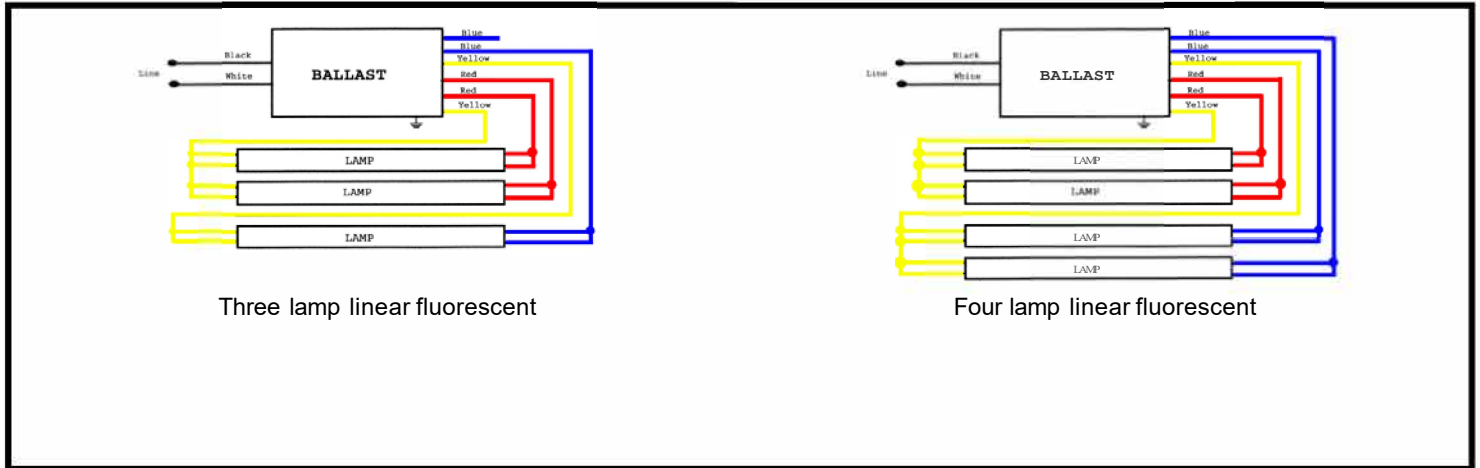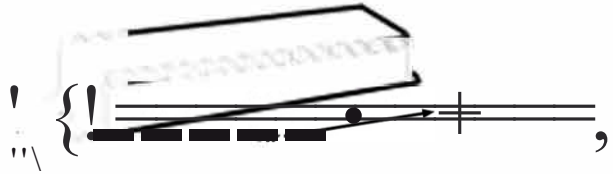

Three lamp linear fluorescent

Four lamp linear fluorescent