

# iRM11

IRM13FLSPFL30K1500WH

# SOLAIS®

LOW-MID OUTPUT | 1-HEAD  
INTERNATIONAL REC. MULTIPLES

PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

- / 230 - 240 V only
- / 50,000 Hours (L70)
- / Driver included
- / SAA, CE and CCC Certified
- / RoHS-compliant
- / Dry location rating
- / Contain no lead or mercury
- / 90+ High CRI standard
- / Non-dimmable



#### Ordering Information

Example: iRM11/NF/950/1500/WH



Fixture	Beam Spread	CRI + CCT	Lumen Output	Flange Color
iRM11	SP - Spot NF - Narrow Flood FL - Flood WF - Wide Flood	927 - 90 CRI, 27K 930 - 90 CRI, 30K 935 - 90 CRI, 35K 940 - 90 CRI, 40K 950 - 90 CRI, 50K	950 1500	WH - White BK - Black SV - Silver





Ceiling Cut-Out: 5 1/4" x 5 1/4"



950 Lumen



1500 Lumen



Warranty

**WARNING:** Not for use in fully enclosed luminaires. Risk of electric shock. Use in an indoor, dry location only. This device is not intended for use with emergency exit fixtures or emergency exit lights. May not be compatible with all dimmers; please visit [solais.com/dimming](http://solais.com/dimming) for up-to-date dimmer compatibility information.

**NOTES:** This device complies with Part 15 of the FCC Rule. This product may cause interference with other devices. If interference occurs, change the locations of the products involved. **Compatible on 120v systems.**

# iRM12

LOW-MID OUTPUT | 2-HEAD  
INTERNATIONAL REC. MULTIPLES

SOLAIS®

PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

- / 230 - 240 V only
- / 50,000 Hours (L70)
- / Diver included
- / SAA, CE and CCC Certified
- / RoHS-compliant
- / Dry location rating
- / Contain no lead or mercury
- / 90+ High CRI standard
- / Non-dimmable



## Ordering Information


Example: iRM12/NF/950/1500/WH

Fixture	Beam Spread	CRI + CCT	Lumen Output	Flange Color
iRM12	SP - Spot NF - Narrow Flood FL - Flood WF - Wide Flood	927 - 90 CRI, 27K 930 - 90 CRI, 30K 935 - 90 CRI, 35K 940 - 90 CRI, 40K 950 - 90 CRI, 50K	950 1500	WH - White BK - Black SV - Silver




Ceiling Cut-Out: 5 1/4" x 9 3/4"

950 Lumen

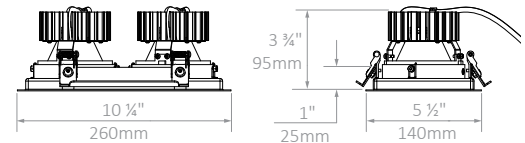

1500 Lumen

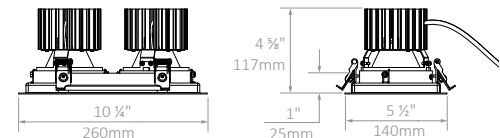

Warranty

**WARNING:** Not for use in fully enclosed luminaires. Risk of electric shock. Use in an indoor, dry location only. This device is not intended for use with emergency exit fixtures or emergency exit lights. May not be compatible with all dimmers; please visit [solais.com/dimming](http://solais.com/dimming) for up-to-date dimmer compatibility information.

**NOTES:** This device complies with Part 15 of the FCC Rule. This product may cause interference with other devices. If interference occurs, change the locations of the products involved. **Compatible on 120v systems.**

# iRM13

LOW-MID OUTPUT | 3-HEAD  
INTERNATIONAL REC. MULTIPLES

SOLAIS®

PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

- / 230 - 240 V only
- / 50,000 Hours (L70)
- / Diver included
- / SAA, CE and CCC Certified
- / RoHs-compliant
- / Dry location rating
- / Contain no lead or mercury
- / 90+ High CRI standard
- / Non-dimmable



## Ordering Information



Example: iRM13/NF/950/1500/WH

Fixture	Beam Spread	CRI + CCT	Lumen Output	Flange Color
iRM13	1 SP - Spot NF - Narrow Flood 2 FL - Flood WF - Wide Flood	927 - 90 CRI, 27K 930 - 90 CRI, 30K 935 - 90 CRI, 35K 940 - 90 CRI, 40K 950 - 90 CRI, 50K	950 1500	WH - White BK - Black SV - Silver





Ceiling Cut-Out: 5 1/4" x 15 1/4"

950 Lumen



1500 Lumen



Warranty

**WARNING:** Not for use in fully enclosed luminaires. Risk of electric shock. Use in an indoor, dry location only. This device is not intended for use with emergency exit fixtures or emergency exit lights. May not be compatible with all dimmers; please visit [solais.com/dimming](http://solais.com/dimming) for up-to-date dimmer compatibility information.

**NOTES:** This device complies with Part 15 of the FCC Rule. This product may cause interference with other devices. If interference occurs, change the locations of the products involved. **Compatible on 120v systems.**

# iRM14

LOW-MID OUTPUT | 4-HEAD  
INTERNATIONAL REC. MULTIPLES

SOLAIS®

PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

- / 230 - 240 V only
- / 50,000 Hours (L70)
- / Diver included
- / SAA, CE and CCC Certified
- / RoHS-compliant
- / Dry location rating
- / Contain no lead or mercury
- / 90+ High CRI standard
- / Non-dimmable



## Ordering Information

Example: iRM14/NF/950/1500/WH



Fixture	Beam Spread	CRI + CCT	Lumen Output	Flange Color
iRM14	SP - Spot	927 - 90 CRI, 27K	950	WH - White
	NF - Narrow Flood	930 - 90 CRI, 30K	1500	BK - Black
	FL - Flood	935 - 90 CRI, 35K		SV - Silver
	WF - Wide Flood	940 - 90 CRI, 40K		
		950 - 90 CRI, 50K		





Ceiling Cut-Out: 5 1/4" x 19 1/4"



950 Lumen



1500 Lumen



Warranty

**WARNING:** Not for use in fully enclosed luminaires. Risk of electric shock. Use in an indoor, dry location only. This device is not intended for use with emergency exit fixtures or emergency exit lights. May not be compatible with all dimmers; please visit [solais.com/dimming](http://solais.com/dimming) for up-to-date dimmer compatibility information.

**NOTES:** This device complies with Part 15 of the FCC Rule. This product may cause interference with other devices. If interference occurs, change the locations of the products involved. **Compatible on 120v systems.**