

MID-HIGH OUTPUT | 5-INCH CYLINDER LUMINAIRE FIXTURE

PROJECT _____


TYPE _____

The Solais 5-inch Diameter Cylinder Luminaire Fixture excels in high-performance lighting applications that demand the lumen output, center beam candle power and color rendering needed in high-end retail, hospitality, health-care, commercial and other architectural applications.

- / Field-replaceable LED module with integrated driver; No tools needed
- / 120 V Standard; *277 V option available
- / 50,000 Hours (L70)
- / RoHS-compliant
- / Certified to UL Standards
- / Dry location rating
- / Contain no lead or mercury
- / Fully dimmable; Compatibility list available
- / Extruded aluminum housing
- / Stem mount comes with a 22" field-adjustable stem standard
- / Cable mount comes with a 48" field-adjustable cable standard
- / Designed to mount to a standard 4" x 4" J-box

XCBKST3=3' STEM MOUNT FOR CYLINDER, W/CANOPY COVER - BLACK FINISH

- / *VioLight and *MonoWhite color rendering enhancements available
- / *90+ High CRI available (Replace 'K' in CCT designation with 'h')

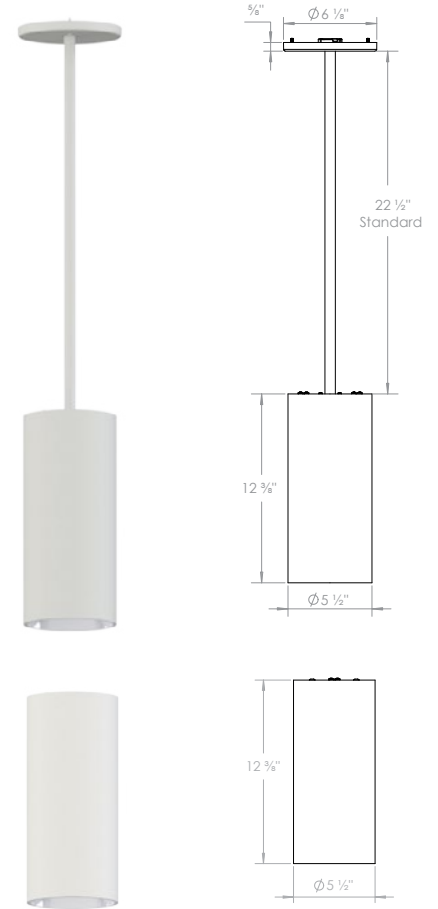

Ordering Information

Example: XC5/Xm24/40/30K/1600/SD/WH/ST/SP

Fixture	Module	Beam Spread	CCT / Lumens	Exterior Finish	Options + Accessories	
XC5	Xm24	COB-optic	27K / 1550	WH - White BK - Black SV - Silver	277V* HL - Honeycomb Louver SL - Linear Spread SP - Prismatic Spread SS - Solite Spread More Accessories Available	
			15c			30K / 1600
			25c			35K* / 1600
			40c			35m* / 1600
						40K* / 1600
						40K* / 1600
		Multi-optic	27K / 1550	SD - Semi-diffused Specular CL - Clear Specular DG* - Semi-diffused Gold CG* - Clear Gold SV - Silver WH - White BK - Black		
			15		30K / 1600	
			25		35K* / 1600	
			40		40K* / 1600	
					27K / 1800	
					30K / 1850	
	30v / 1850	Lensed Options SDL - Lensed Semi-diffused Specular CLL - Lensed Clear Specular DGL* - Lensed Semi-diffused Gold CGL* - Lensed Clear Gold SVL - Lensed Silver WHL - Lensed White BKL - Lensed Black				
	35K* / 1850					
	40K* / 1850					
	27K / 2300					
	30K / 2400					
	35K* / 2400					
	40K* / 2400					

Mounting Options
ST - Stem mount
CB - Cable mount
SM - Surface mount

Beam Angles			
15°	25°	40°	
Color Temperature			
2700K	3000K	3500K*	4000K*
Finish Colors			
White	Silver	Black	
Clear Specular	Semi-diffused Specular	Clear Gold*	Semi-diffused Gold*

*Consult factory for lead time and availability

Note: VioLight, MonoWhite and High CRI products will produce up to 20% less measured lumens than their standard CCT equivalent; Although, perceived lumens for VioLight and MonoWhite products will be noticeably higher than their standard counterparts.

Module	Module Code			Power (Watts)	CBCP (cd)	Standard CRI
	Beam Angle	CCT	Delivered Lumens			
Xm24 Module	15c	27K	1500	20	6030	82
	25c				4100	
	40c				2180	
	15c	30K	1600		6700	
	25c				4555	
	40c				2425	
	15c	35m*	≈1600		6700	90
	25c				4555	
	40c				2425	
	15	27K	1550	19	12700	85
	25				7900	
	40				3100	
	15	30K	1600		13100	
	25				8150	
	40				3200	
	15	27K	1800	22	14675	
	25				9165	
	40				3600	
	15	30v*	≈1850		15140	
	25				9420	
	40				3700	
	15	30K	1850		15140	
	25				9420	
	40				3700	
	15	27K	2300	28	18880	
	25				11740	
	40				4600	
	15	30K	2400		19680	
25	12240					
40	4800					

WARNING: Not for use in fully enclosed luminaires. Risk of electric shock. Use in an indoor, dry location only. This device is not intended for use with emergency exit fixtures or emergency exit lights. May not be compatible with all dimmers; please visit solais.com/dimming for up-to-date dimmer compatibility information.

NOTES: This device complies with Part 15 of the FCC Rule. This product may cause interference with other devices. If interference occurs, change the locations of the products involved. **Compatible on 120v systems.**



Warranty



IES Files



Dimmers



Accessories



Luxiance utilizes active cooling to remove heat from the LED system - allowing Solais LED lamps to operate cooler, resulting in superior life, light output, and performance.



Thermal Throttle – In the event that Solais products begin to overheat, they will undetectably dim themselves to protect your technology investments.



X-CHANGEABLE

X-Changeable is our all-in-one technology that incorporates the optics, LEDs, driver and power within a replaceable module. This allows you to change the lumen output, color temperature, beam angle and trim color with ease.



VIOLIGHT™

VioLight radiates superior quality, enhancing colors in merchandise, making colors more vibrant and offering a truly competitive LED replacement for CMH-like crispness.