

Catalog No. \_\_\_\_\_

Type \_\_\_\_\_

Project \_\_\_\_\_

# RLMA15

## A15 Incandescent Gravity-Fit Pendant Track Fixture

### Specifications/Features

RLM Track Pendants from ConTech Lighting offer both simplicity and beauty.

Bicycle cable wiring cover keeps cord straight for clean appearance.

Available in 2', 4' and 8' lengths. Cord may be field modified for shorter lengths.

Compatible with a wide array of gravity-fit decorative shades. Shades sold separately. A minimum shade height of 6" is recommended to cover the lamp.

Includes track adapter for mounting with a convenient on/off switch and polarity indicator. The track connector is shipped in the carton, but not attached. Requires field connection AFTER the glass is slid onto the gravity-fit socket.

May be also used with LA-18 Mono-Point adapter, CTR618 Line Voltage Recessed Adapter Plate or LIR59875 Odyssey Flexible Track Adapter (each must be ordered separately).

### Lamp/Electrical

(1) 120V 60W A15 Lamp, E26 Medium Base (max.).

Lamps sold separately.



Does not require a transformer.

### Warranty

This complete fixture is covered by ConTech's full one (1) year replacement guarantee after date of purchase.

### Listing


cULus listed for dry locations.

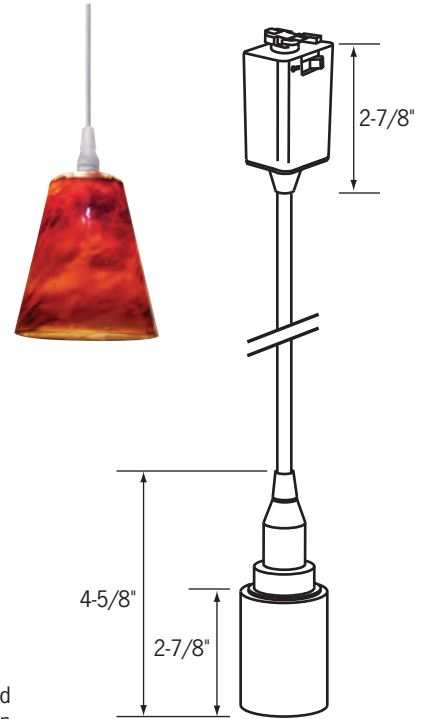

### Gravity-Fit Shade and Pendant Assembly


Gravity-fit shades are attached over the cable and rest on the socket flange.

Shown with included track adapter



### Mono-Point Adapter

Mounts 120V Pendant to outlet box.  
**LA-18-(B,P,S)**



**Odyssey Flexible Track Adapter**  
Connect pendant to Odyssey Flexible Track System. 10 lb. load capacity.  
**LIR59875-(AB,S)**

### Ordering Information

Example Order:  —

Fixture  — Finish

- |                                     |                   |
|-------------------------------------|-------------------|
| <b>RLMA1524N</b> - 2' (24") Pendant | <b>B</b> - Black  |
| <b>RLMA1548N</b> - 4' (48") Pendant | <b>P</b> - White  |
| <b>RLMA1596N</b> - 8' (96") Pendant | <b>S</b> - Silver |

Adapters  — Finish

- |                                   |   |
|-----------------------------------|---|
| <b>LA-18</b> - Mono-Point Adapter | <b>AB</b> - Antique Bronze<br><i>Odyssey Adapter Only</i> |
| <b>LIR59875</b> - Odyssey Adapter | <b>B</b> - Black  |
|                                   | <b>P</b> - White  |
|                                   | <b>S</b> - Silver   |